


# PCL-726

# PCL-728

## 12-bit, 6-ch Analog Output ISA Card with 32-ch DI/O

## 12-bit, 2-ch Isolated Analog Output ISA Card

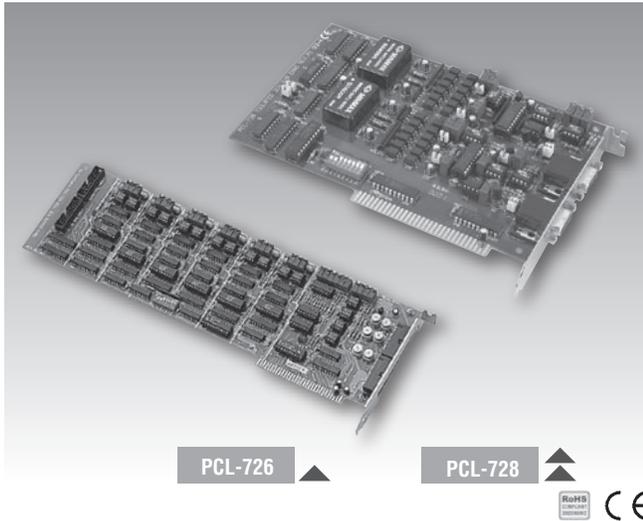

### Features

- Independent analog output channels
- 12-bit resolution double-buffered D/A converter
- Multiple voltage ranges:  $\pm 10$  V,  $\pm 5$  V,  $0 \sim +5$  V,  $0 \sim +10$  V and  $4 \sim 20$  mA current loop (sink)
- 16 digital input and 16 digital output channels (PCL-726)
- Two DB9 connectors for easy wiring (PCL-728)

### Introduction

PCL-726, and PCL-728 are analog output cards with 12-bit analog output channels. You can individually configure each channel to any of the following ranges:  $0$  to  $+5$  V,  $0$  to  $+10$  V,  $\pm 5$  V,  $\pm 10$  V and  $4$  to  $20$  mA current loop (sink). Designed for use in industrial environments, these cards are ideal, economical solutions for applications that require multiple analog outputs or current loops.

### Specifications

#### Analog Output

- **Channels** 6 (PCL-726 only)  
2 Isolated (PCL-728 only)
- **Resolution** 12 bits, double buffered
- **Output Rate** Static update
- **Reference Clock** Internal:  
External Clock Frequency:  
External Voltage Range:
- **Output Range** (Software programmable)

Internal Reference	<b>Bipolar (V)</b>	$\pm 5$ , $\pm 10$
	<b>Unipolar (V)</b>	$0 \sim 5$ , $0 \sim 10$
	<b>Current Loop (mA)</b>	$4 \sim 20$

- **Slew Rate**  $0.3$  V/ $\mu$ s
- **Driving Capability**  $\pm 5$  mA max.
- **Output Impedance**  $0.1 \Omega$
- **Operation Modes** Software polling
- **Accuracy** Relative:  $\pm 0.012\%$  full scale range  
Differential Linearity:  $\pm 1/2$  bit
- **Current Loop Excitation Voltage** Minimum  $+8$  V, maximum  $+36$  V for  $4 \sim 20$  Voltage mA current loop

#### Digital Input (PCL-726)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0:  $0.8$  V max.  
Logic 1:  $2.0$  V min.

#### Digital Output (PCL-726)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0:  $0.5$  V, Logic 1:  $2.4$  V
- **Output Capability** Sink:  $0.5$  V @  $0.4$  mA max.  
Source:  $2.7$  V @  $50$  mA max.

#### General

- **Bus Type** ISA
- **I/O Connectors** PCL-726: 4 x 20-pin male ribbon cable connectors  
PCL-728: 2 x DB9 connectors
- **Dimensions (L x H)** PCL-726:  $340 \times 100$  mm ( $13.4" \times 3.9"$ )  
PCL-728:  $184 \times 119$  mm ( $7.25" \times 4.7"$ )
- **Power Consumption**  
PCI-726:  $+5$  V @  $500$  mA typical,  $1$  A max.  
 $+12$  V @  $80$  mA typical,  $110$  mA max.  
 $-12$  V @  $60$  mA typical,  $90$  mA max.  
 $+5$  V @  $800$  mA max.  
PCL-728:  
0  $\sim 50^\circ$  C ( $32 \sim 122^\circ$  F)  
0  $\sim 65^\circ$  C ( $32 \sim 149^\circ$  F)
- **Operating Humidity** 5  $\sim 95\%$  RH, non-condensing (refer to IEC 68-2-3)

### Ordering Information

- **PCL-726** 6-ch analog output card with digital I/O
- **PCL-728** 2-ch isolated analog output card
- **PCL-10120-1** 20-pin flat cable, 1 m
- **PCL-10120-2** 20-pin flat cable, 2 m
- **PCLD-780** Screw terminal board
- **PCLD-782** Opto-Isolated D/I board (16-ch)
- **PCLD-785** Relay output board (16-ch)
- **PCLD-880** Universal screw terminal board
- **ADAM-3909** DB9 wiring terminal for DIN-rail mounting
- **ADAM-3920** 20-pin wiring terminal for DIN-rail mounting