


Medical Station Accessory Selection

TF-PER-M71

Wireless LAN Kit

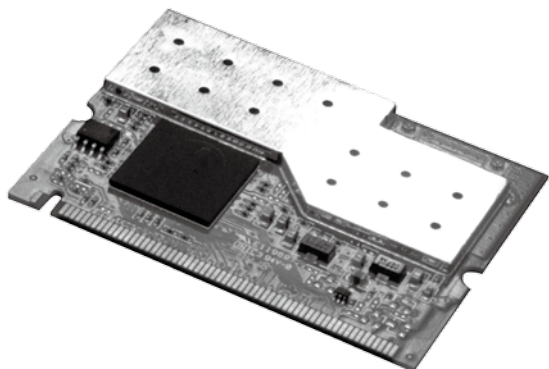

Specifications

Main Specifications

IEEE Standard	802.11b/g
Data Rate	Up to 54 Mbps
OS Support	Windows® XP, XP Pro, XPE, WES, WES 7, Windows® 7, Linux
Operating Temperature	32°F ~ 149°F (0°C ~ 65°C)

Features


- Mini-PCI Interface
- IEEE 802.11b/g Wireless LAN
- Includes Antenna And Driver

Ordering Information

- » TF-PER-M71
Wireless LAN Kit

TF-PER-M07/M28/M29

Mini-PCI Capture Card

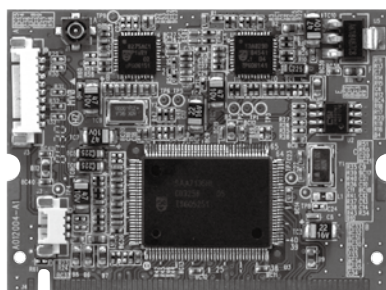

Specifications

Main Specifications

Main Chip Silicon Tuner (RF)	Philips® SAA7131 Philips® 8275AC
Video Input	RF-In (RF SMD connector) S-Video , Composite Video
Audio Input	Right & Left (for J5)
Video Capture rate	30 frames/second (NTSC) 25 frames/second (PAL, SECAM)
Hardware Interface	Mini-PCI Bus
Drivers support	BDA driver for Windows 2000, XP

Features

- Worldwide TV Standard
- Worldwide TV Stereo
- Mini-PCI Type IIIB

Ordering Information

- » TF-PER-M07
Mini-PCI Capture Card, PROVIDEO, PV-970A, for ONYX-1x3/ 170/ 190
- » TF-PER-M28
Mini-PCI Capture Card, PROVIDEO, PV-970A, for ONYX-1x4/ 150
- » TF-PER-M29
Mini-PCI Capture Card, PROVIDEO, PV-970A, for ONYX-1x5/ 1x5S





Light Source	650 nm visible laser diode
Depth of Field	35 – 200 mm for UPC/EAN 100%
Scan Angle	52°
Scan Rate	500 Scans Per Second
Pitch/Roll/Skew Angle	65° / 30° / 65°
Minimum Bar Width	5 mil @ PCS 90% (Code 39)
Print Contrast	30% @ UPC/EAN 100%
Indicators (LED)	Three-color LED (green, red & blue)
Beeper Operation	Programmable tone & beep time
System Interfaces	Keyboard, RS-232C, USB1.1, wand

