

PCI-1752U/1752USO


PCI-1754

PCI-1756

64-ch Isolated Digital Output Universal PCI Card

64-ch Isolated Digital Input PCI Card

64-ch Isolated Digital I/O PCI Card

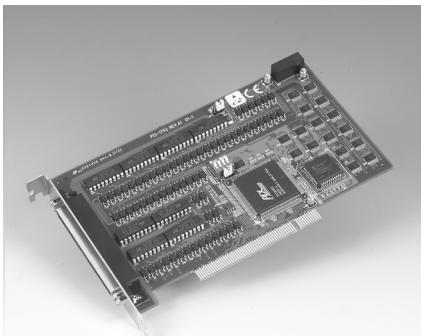

PCI-1752



PCI-1754



PCI-1756



Features

- 64 isolated digital output channels
- High-voltage isolation on output channels (2500 V_{DC})
- 2000 V_{DC} ESD protection
- Wide output range (5 ~ 40 V_{DC})
- High-sink current on isolated output channels (200 mA max./channel)
- Output status read-back
- Keeps digital output values when hot system reset
- Channel-freeze function
- High-density 100-pin SCSI connector
- Support sink (1752U) & Source (1752USO) DO type

Specifications

Isolated Digital Output


- | | |
|--------------------------|------------------------|
| ▪ Channels | 64 (16-ch/group) |
| ▪ Output Type | Sink (NPN) |
| ▪ Isolation Protection | 2,500 V _{DC} |
| ▪ Output Voltage | 5 ~ 40 V _{DC} |
| ▪ Sink Current | 200 mA max./channel |
| ▪ Opto-isolator Response | 25 µs |

General


- | | |
|-------------------------|---|
| ▪ Bus Type | Universal PCI V2.2 |
| ▪ I/O Connectors | 1 x 100-pin SCSI-II female |
| ▪ Dimensions (L x H) | 175 x 100mm (6.9" x 3.9") |
| ▪ Power Consumption | Typical: +5 V @ 230 mA Max.: +5 V @ 500 mA |
| ▪ Operating Temperature | 0 ~ 60° C (32 ~ 140° F) (IEC 68-2-1, 2) |
| ▪ Storing Temperature | -20 ~ 70° C (-4 ~ 158° F) |
| ▪ Storing Humidity | 5 ~ 95% RH, (IEC 68-2-3) non-condensing |

Ordering Information

- PCI-1752U 64-ch Isolated Digital Output Card (Sink type)
- PCI-1752USO 64-ch Isolated Digital Output Card (Source type)
- PCL-10250-1 1w-pin to two 50-pin SCSI Castle, lm
- ADAM-3951 Wiring terminal module with LED-indicators for DIN-rail Mounting

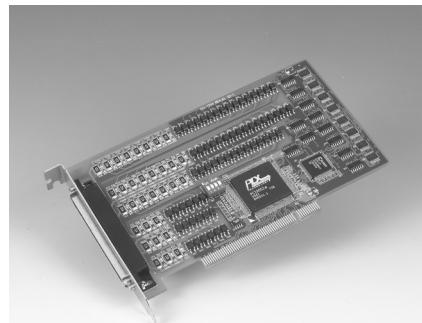

PCI-1754

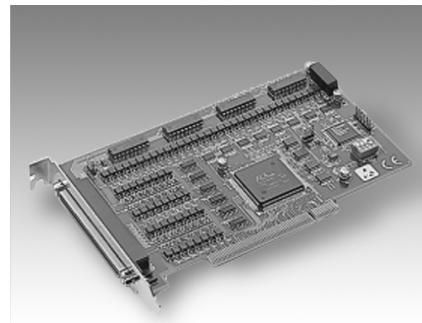

PCI-1756

Features

- 64 isolated digital input channels
- Either +/- voltage input for DI by group
- High-voltage isolation on input channels (2500 V_{DC})
- High over-voltage protection (70 V_{DC})
- Wide input range (10 ~ 50 V_{DC})
- Interrupt handling capability
- High-density 100-pin SCSI connector

Specifications

Isolated Digital Input

- | | |
|---------------------------|---|
| ▪ Channels | 64 (16-ch/group) |
| ▪ Input Voltage | Logic 0: 3 V max. Logic 1: 10 V min. (50 V max.) |
| ▪ Input Current (Typical) | 10 V _{DC} @ 1.7 mA, 12 V _{DC} @ 2.1 mA 24 V _{DC} @ 4.4 mA, 48 V _{DC} @ 9.0 mA 50 V _{DC} @ 9.4 mA |
| ▪ Interrupt Capable Ch. | 4 |
| ▪ Isolation Protection | 2,500 V _{DC} |
| ▪ Overvoltage Protection | 70 V _{DC} |
| ▪ ESD | 2,000 V _{DC} |
| ▪ Opto-Isolator Response | 25 µs |
| ▪ Input Current | 10 V _{DC} @ 1.7 mA, 12 V _{DC} @ 2.1 mA 24 V _{DC} @ 4.4 mA, 48 V _{DC} @ 9.0 mA 50 V _{DC} @ 9.4 mA |

General

- | | |
|-------------------------|---|
| ▪ Bus Type | PCI V2.2 |
| ▪ I/O Connectors | 100-pin SCSI-II female |
| ▪ Dimensions (L x H) | 175 x 100mm (6.9" x 3.9") |
| ▪ Power Consumption | Typical: +5 V @ 340 mA Max.: +5 V @ 450 mA |
| ▪ Operating Temperature | 0 ~ 60° C (32 ~ 140° F) (IEC 68-2-1, 2) |
| ▪ Storing Temperature | -20 ~ 70° C (-4 ~ 158° F) |
| ▪ Storing Humidity | 5 ~ 95% RH (IEC 68-2-3) non-condensing |

Ordering Information

- PCI-1754 64-ch isolated digital input card
- PCL-10250-1 1w-pin to two 50-pin SCSI Castle, lm
- ADAM-3951 Wiring terminal module with LED-indicators for DIN-rail Mounting

Features

- Either +/- voltage input for DI by group
- Output status read-back for output channels
- Keeps digital output values after hot system reset

Specifications

Isolated Digital Input

- | | |
|--------------------------|---|
| ▪ Channels | 32 (16-ch/group) |
| ▪ Input Voltage | Logic 0: 3 V max. Logic 1: 10 V min. (50 V max.) |
| ▪ Interrupt Capable Ch. | 2 (IDIO, IDI16) |
| ▪ Isolation Protection | 2,500 V _{DC} |
| ▪ Overvoltage Protection | 70 V _{DC} |
| ▪ ESD | 2,000 V _{DC} |
| ▪ Opto-Isolator Response | 25 µs |
| ▪ Input Current | 10 V _{DC} @ 1.7 mA, 12 V _{DC} @ 2.1 mA 24 V _{DC} @ 4.4 mA, 48 V _{DC} @ 9.0 mA 50 V _{DC} @ 9.4 mA |

Isolated Digital Output

- | | |
|--------------------------|------------------------|
| ▪ Channels | 32 (16-ch/group) |
| ▪ Output Type | Sink (NPN) |
| ▪ Isolation Protection | 2,500 V _{DC} |
| ▪ Output Voltage | 5 ~ 40 V _{DC} |
| ▪ Sink Current | 200 mA max./channel |
| ▪ Opto-Isolator Response | 25 µs |

General

- | | |
|-------------------------|---|
| ▪ Bus Type | PCI V2.2 |
| ▪ I/O Connectors | 1 x 100-pin SCSI-II female |
| ▪ Dimensions (L x H) | 175 x 100mm (6.9" x 3.9") |
| ▪ Power Consumption | Typical: +5 V @ 285 mA Max.: +5 V @ 475 mA |
| ▪ Operating Temperature | 0 ~ 60° C (32 ~ 140° F) (IEC 68-2-1, 2) |
| ▪ Storing Temperature | -20 ~ 70° C (-4 ~ 158° F) |
| ▪ Storing Humidity | 5 ~ 95% (IEC 68-2-3) non-condensing |

Ordering Information

- PCI-1756 64-ch Isolated Digital I/O Card
- PCL-10250-1 1w-pin to two 50-pin SCSI Castle, lm
- ADAM-3951 Wiring terminal module with LED-indicators for DIN-rail Mounting