

USB Drive *plus S*



Storage media which is directly supported by the USB Drive *plus S*

24 Months Warranty



More details

USB Drive <i>plus S</i>	Item no.
USB Drive <i>plus S</i> internal	B25AL153
USB Drive <i>plus S</i> external grey	B25AL153E

Internal or external drive for USB 2.0 interface with four different slots and very high transfer rates

- Very fast internal drive with standard 3.5" case and high speed USB 2.0 interface with slots for most popular Flash memory cards; also available as an external version in a robust plastic case in grey; other colours on request
- Four slots for memory cards:
 - 1.) ATA PC Card or HDD in PC Card format (Type I or II)
 - 2.) CompactFlash Card (Type I or II) or Microdrive
 - 3.) SD & SDHC Card (supports SD/SDHC High-Speed Mode), MMC & MMC plus
 - 4.) Memory Stick PRO/PRO Duo/PRO-HG/PRO-HG Duo
- Each slot appears under Windows as a separate removable media drive; data can be copied fast and directly between cards inserted in different slots
- By using appropriate PC Card, CF or MS PRO adapters compatible with memory cards such as miniSD/SDHC, microSD/SDHC, Memory Stick Micro M2 or xD-Cards
- USB 2.0 Mass Storage compliant; downwards compatible to USB 1.1
- Windows ME, 2000 with Service Pack 3, XP, Vista and Linux compatible using drivers contained in operating system; special drivers are necessary for Windows 98 SE and 2000 without SP3
- Power supply via standard connector at internal version, external version USB bus powered; external power supply available on request
- Optional extensions such as activation of software write protection and unmounting of cards from application software


Technical Specifications

RoHS COMPLIANT
2002/95/EC

Hardware		– Temperature	0° to +70°C (operating) –40° to +75°C (non-operating)
– Interface	USB 2.0 high speed	Electrical	
– Memory card slots	1x PC Card (Type I, II); 1x CompactFlash (Typ I + II); 1x SD/SDHC/MMC/MMCplus; 1x Memory Stick PRO/PRO Duo/PRO-HG/PRO-GH Duo	– Power consumption	depends on memory card type
– Dimensions	LxWxH: 142 x 101.6 x 25.4 mm; standard 3.5" drive dimensions; external version LxWxH: 147 x 108 x 32 mm	System Performance	
Environmental Specifications		– Data Transfer Rate	depends on memory card type and USB connection (USB 1.1 or 2.0)
– Humidity	0% to 90%, non-condensing	Software	
		– Supported OS	No driver required for Windows ME, 2000 SP3, XP, Vista and Linux; with drivers Win 98 SE and 2000 w/o SP3


altec ComputerSysteme GmbH
Bayernstr. 10 · 30855 Langenhagen · Germany
Phone +49-511-9 83 81-0 · Fax +49-511-9 83 81-49
eMail: info@altec-cs.com
Web: www.altec-cs.com

ISO 9001:2000 certified




altec
card copy machines

More details about the USB Drive *plus* S

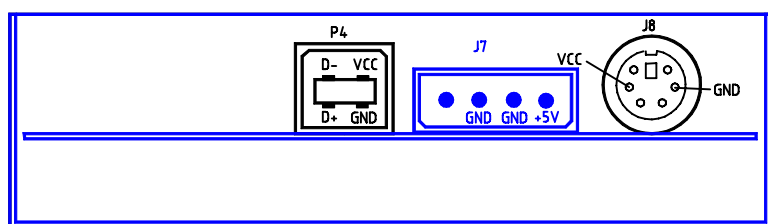


Connector pin assignment internal

Rear view

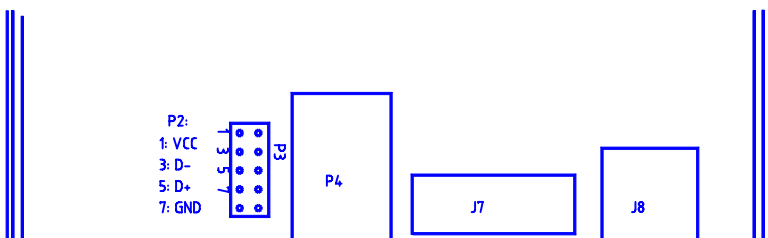


Connector pin assignment internal

Top view

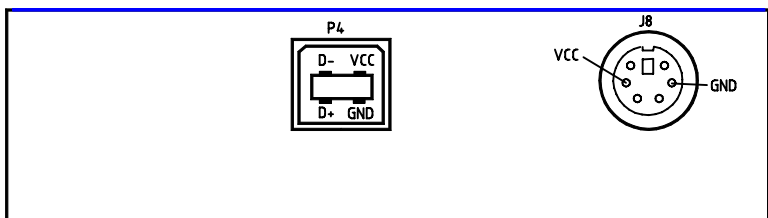

Connectors external

Rear view

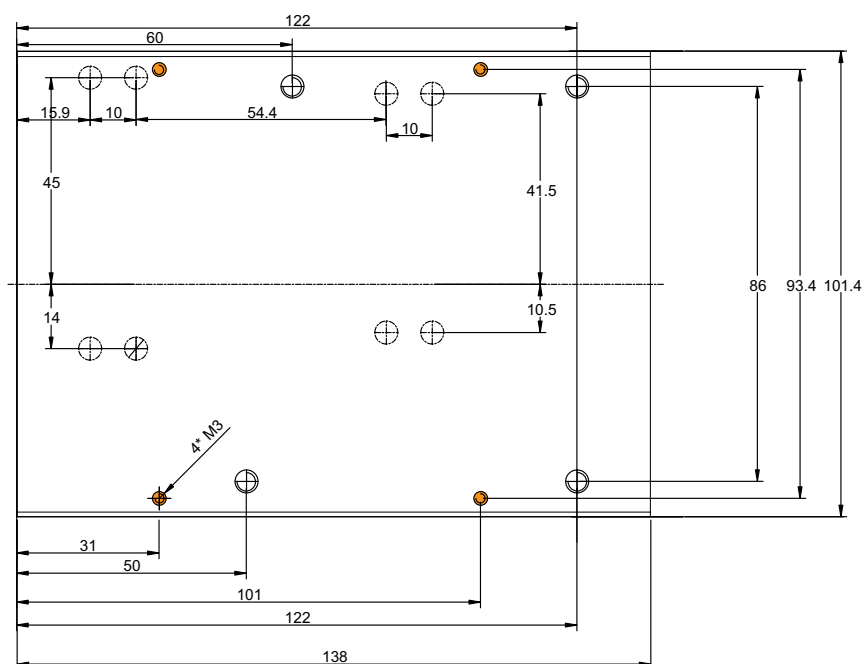


Mechanical Dimensions

Bottom View

A total of four bottom and four side mounting holes (marked in orange) are available for installation.

The mounting holes require M3 screws with a maximum depth of 5 mm.

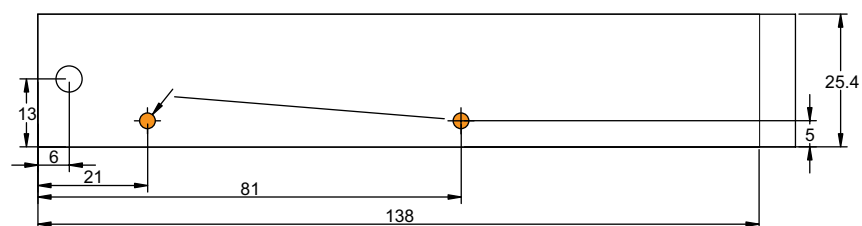

Mechanical Dimensions

Side View