


MSC-102C

2-Port RS-232/422/485 Universal PCI Card

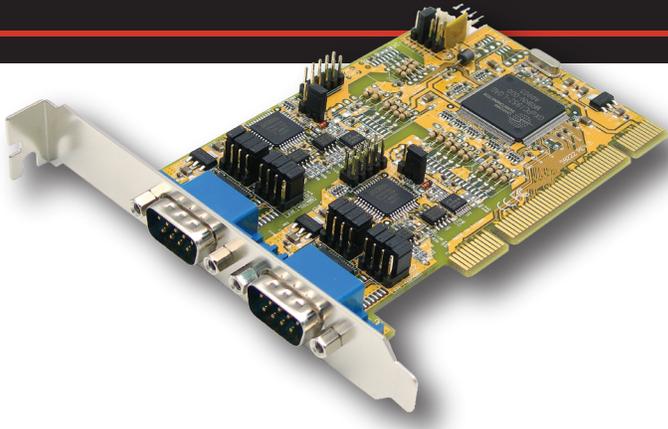

Features

- ▶ Provides dual RS-232/422/485/ Ports over PCI Slot
- ▶ PCI 32-bit, PIO Mode with 133MB/S Bandwidth
- ▶ Supports RS-232, RS-422/485 4-wire and 2-wire Modes
- ▶ Modes of Each Port can be Set Independently
- ▶ Supports RS-485 Auto Transceiver Turn Around by ATTA™ Hardware
- ▶ PCI IRQ Sharing Feature Eliminates IRQ Conflicts
- ▶ Supports Optional DB9F to 5-pin Terminal Adapter
- ▶ Supports Baud Rate up to 921.6Kpbs
- ▶ Optional Model: 2500Vrms Isolation and 500-Watt Surge Protection
- ▶ Supports Win98, Me, NT, XP, 2000, 2003, Vista and Linux

Specifications

System

For 32-bit 33/66MHZ PCI Bus Systems

PCI Interface

Fully PCI Bus Specification 2.2 compliant

Serial Port(s)

2 x DB9-male RS-232/422/485 Connectors

Interface

4 modes are selectable:

- RS-232 (TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND)
- 4-wire RS-422 (TXD+/-, RxD+/-)
- 2-wire RS-485 (TxD+/-, RxD+/-)
- 2-wire RS-485 (Data+/-, Data+/-)

Parity

None, Even, Odd

Data bits

5,6,7,8,9 bits Data Frames

Baud Rate

Up to 921.6Kbps

Terminator

120 OHM, can be Enabled/Disabled by Jumpers

Isolation Protection (MSC-102C-SI Model)

Optical Isolated

Surge Protection (MSC-102C-SI Model)

15KV ESD Surge Protection Circuits

ATTA™

Auto RS-485 Transmitter buffer direction control by the ATTA™ Hardware

OS Support

Windows 9x, Me, XP, NT, 2000, 2003, Vista, and Linux

Operating Temperature

0 to 55°C (32 to 131°F)

Operating Humidity

10% to 90% relative humidity (non-condensing)

Storage Temperature

-40 to 75°C (-40 to 167°F)

Storage Humidity

5% to 95% relative humidity (non-condensing)

Dimensions

4.72" x 2.91" (12.00cm x 7.40cm)

Warranty

5-Year Warranty

Ordering Information

MSC-102C 2-Port RS-232/422/485 Universal PCI Card
MSC-102C-SI 2-Port RS-232/422/485 Universal PCI Card with Surge and Isolation