

**CONNECT AND PROTECT**

**Accessories**

  
nvent

**SCHROFF**



# Climate control – Accessories

## HEATERS FROM 10 W TO 150 W



10 / 20 W

Dimension drawing

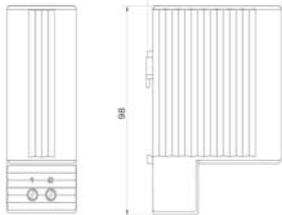
 38  
75



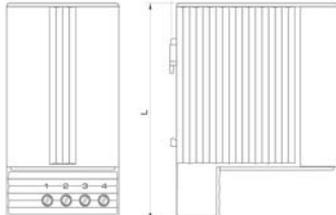
10 / 20 W



01116002

50 / 100 / 150 W

01116001


 60  
90


01116054

50 / 100 / 150 W

01116053

- Compact heater without fan
- Simple and fast assembly with clip-on attachment
- Broad range voltage input AC/DC 120 ... 240 V
- Low surface temperature, protective insulation, and temperature limitation with PTC resistance



### DELIVERY INCLUDES (completely assembled)

Item	Qty	Description
1	1	Heater element, voltage AC/DC 100 ... 240 V; PTC resistor, self-regulating
2	1	Heating body housing, plastic UL94 V-0; type of fixing: Clip for 35 mm DIN rail EN 60715
3	1	Connection: 2-pin (10 W, 20 W) and/or 4-pin (50 W, 100 W, 150 W) terminal, 2.5 mm <sup>2</sup> , torque 0.8 Nm max.

### ORDER INFORMATION

Description	Part no.
10 W	<b>60715-220</b>
20 W	<b>60715-221</b>
50 W	<b>60715-222</b>
100 W	<b>60715-223</b>
150 W	<b>60715-224</b>

### NOTE

- Thermostat for heating see page 4.65
- Hygrostat see page 4.68

### TECHNICAL DATA

	10 W	20 W	50 W	100 W	150 W
Heater output in W	10	20	50	100	150
Max. switch-on current in A	1.0	2.5	2.5	4.5	8.0
Pre-fuse, delay-action in A	2.0	4.0	4.0	8.0	10.0
Type of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Class of protection	II	II	II	II	II
Dimensions H x W x D in mm	98 x 38 x 75	98 x 38 x 75	110 x 60 x 90	110 x 60 x 90	150 x 60 x 90
Weight in kg	0.2	0.3	0.3	0.3	0.5
Connection	2-pin terminal, 2.5 mm <sup>2</sup> , torque 0.8 Nm		4-pin terminal, 2.5 mm <sup>2</sup> , torque 0.8 Nm		
Surface temperature in °C	< + 80°C, with exception of above mesh surface				
Test seal	CE, UL, VDE, EAC, RoHS				
Mounting	Clip-on attachment for 35 mm DIN rail (EN 60715)				

# Climate control – Accessories

## HEATERS WITH HEATER FANS FROM 150 W TO 400 W



- Compact heater with fan, small, compact design with high heater output
- Simple and fast assembly with clip-on attachment or bolt fixing
- Dynamic heating up and temperature limitation by PTC technology
- Quiet



### DELIVERY INCLUDES (completely assembled)

Item	Qty	Description
1	1	Heater element, voltage 230 V <sub>AC</sub> , resistor (PTC resistance) self-regulating
2	1	Heating body housing, plastic UL94 V-0; type of fixing: Clip for 35 mm DIN rail EN 60715
3	1	Axial fan, airflow from bottom to top
4	1	Connection: 2-pin terminal, 2.5 mm <sup>2</sup> , torque 0.8 Nm max.

### ORDER INFORMATION

Description	Part no.
150 W	<b>60715-225</b>
250 W	<b>60715-226</b>
400 W	<b>60715-227</b>



### NOTE

- Thermostat for heating see page 4.65
- Hygrostat see page 4.68

Dimension drawing



Clip attachment



01116050

01116051

### TECHNICAL DATA

	150 W	250 W	400 W
Heater output in W	150	250	400
Max. switch-on current in A	9.0	12	15
Pre-fuse, delay-action in A	10	10	16
Axial fan, free blowing output	13.8 m <sup>2</sup> /h	45 m <sup>2</sup> /h	45 m <sup>2</sup> /h
Type of protection	IP 20	IP 20	IP 20
Class of protection	II	II	II
Dimensions H x W x D in mm	75 x 65 x 90	90 x 85 x 111	90 x 85 x 111
Weight in kg	0.3	0.5	0.5
Surface temperature in °C	< + 50°C, with exception of above mesh surface		< + 65°C, with exception of above mesh surface
Connection	2-pin terminal, 2.5 mm <sup>2</sup> , torque 0.8 Nm max.		
Test seal	CE, UL, VDE, EAC, RoHS		
Mounting	Clip-on attachment for 35 mm DIN rail (EN 60715)		

# Climate control – Accessories

## HEATERS FROM 30 W TO 150 W




- Radiator heater (without fan)
- Simple and fast assembly with clip-on attachment and press-on terminal connection
- Wide input voltage range 110 ... 250 V<sub>AC</sub>
- Temperature limiting with PTC resistor



### DELIVERY COMPRISES (completely assembled)

Item	Qty	Description
1	1	Heater element, voltage range 110 ... 250 V <sub>AC</sub> ; resistor (PTC) self-regulating
2	1	Heating body, Al extrusion, anodised Fixing: clip for 35 mm DIN rail EN 50022
3	1	Connection: type 30, with connecting cable (3 x 0.5 mm <sup>2</sup> , 300 mm long, black); type 45, 100, 150 with press-on terminal connection (for stranded/rigid wire 3 x 0.5 ... 2.5 mm <sup>2</sup> )

01102004

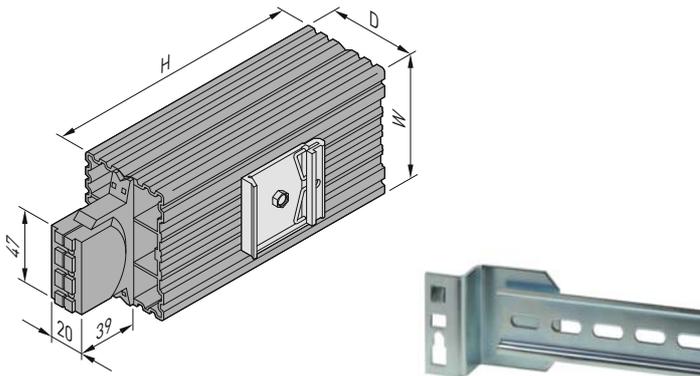

01113050

Support rail

06508013

### ORDER INFORMATION

Description	30	45	100	150
	Part no.	Part no.	Part no.	Part no.
Heaters from 30 W to 150 W	<b>60715-020</b>	<b>60715-021</b>	<b>60715-023</b>	<b>60715-030</b>
Support rail DIN rail EN 50022 (35 mm), length 215 mm, 1 piece				<b>20715-001</b>

### TECHNICAL DATA

	30 W	45 W	100 W	150 W
Heater output in W	30	45	100	150
Surface temperature in °C	approx. 100	approx. 105	approx. 130	approx. 140
Max. switch-on current in A	3,0	3,5	4,0	9,0
Type of protection	IP 54	IP 20	IP 20	IP 20
Class of protection	I	I	I	I
Dimensions H x W x D in mm	70 x 25 x 50	69 x 70 x 50	144 x 70 x 50	224 x 70 x 50
Weight in kg	0.2	0.3	0.5	0.7
Test seal	VDE, CE, UL (File E150057)	CE, UL (File E150057)	CE, UL (File E150057)	CE, UL (File E150057)
Assembly	Clip-on attachment for 35 mm DIN rail (EN 50022)			

### NOTE

- Thermostat for heating see page 4.65
- Hygrostat see page 4.68

# Climate control – Accessories

## HEATER FANS 475/550 W




- Heater with fan and thermostat
- Simple and fast assembly with clip-on attachment
- 3-pin terminal clamp, separate heater/fan connection
- Thermostat from 0 ... 60 °C
- Temperature limiting with PTC resistor



### DELIVERY COMPRISES (completely assembled)

Item	Qty	Description
1	1	Plastic housing, polycarbonate (RAL 9002, grey white), clip for 35 mm DIN rail EN 50022
2	1	Heater element, 230 V <sub>AC</sub> , resistor (PTC) self-regulating
3	1	Thermostat
4	1	230 V <sub>AC</sub> fan

01108030

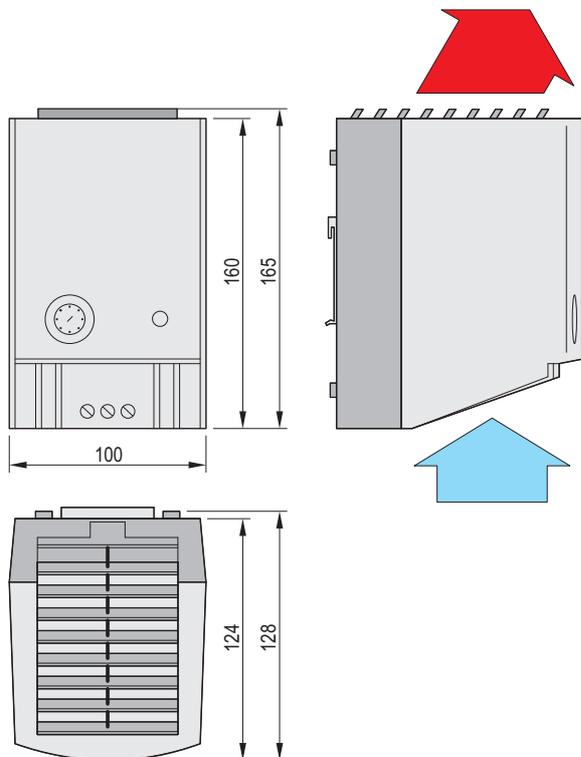

### ORDER INFORMATION

Description	Part no.
Heater 475 W	<b>60715-017</b>
Heater 550 W	<b>60715-018</b>
Support rail DIN rail EN 50022 (35 mm), length 215 mm, 1 piece	<b>20715-001</b>

### TECHNICAL DATA

Voltage range	230 V <sub>AC</sub>			
Frequency	50 Hz	60 Hz	50 Hz	60 Hz
Heater output	<b>475 W</b>	550 W	<b>550 W</b>	650 W
Air capacity of axial fan	35 m <sup>3</sup> /h	39 m <sup>3</sup> /h	45 m <sup>3</sup> /h	50 m <sup>3</sup> /h
Current at switch-on approx.	11 A		13 A	
Weight	0.9 kg		1.1 kg	
Heater element	Resistor (PTC), self-regulating			
Connection	3-pin connecting terminal, 2.5 mm <sup>2</sup> , separate connection heating/fan			
Thermostat	Adjustment range 0 ... 60 °C			
Control lamp of control system	Glow lamp			
Temperature control	In the event of fan failure			
Type of protection	IP 20			
Class of protection	II			
Assembly	Clip-on attachment for 35 mm DIN rail (EN 50022)			
Dimensions	Height 165 mm, width 100 mm, depth 128 mm			

01108069



00508013

Support rail

# Climate control – Accessories

## HEATER FAN 400 W, MODULAR



Example of a complete heater unit: 1: heater, 2: fan, 3: protective grille, 4: connection cable

01108007



Heater element

01108006



Support rail

00508013

- Modular system consisting of: heater element, fan, protective grille and connecting cable
- Fan not included in delivery extent; please order fan with desired air capacity separately
- Simple and fast assembly with clip-on attachment
- Overheating protection through thermal switch



### DELIVERY COMPRISES (completely assembled)

Item	Qty	Description
1	1	Heater element, high-performance cartridge
2	1	Connecting cable fan - heating distributor, length 0.3 m
3	1	GND/earth cable, ring tag - open end, length 0.3 m
4	1	Clip-on attachment for DIN rail with assembly kit

### ORDER INFORMATION

Description	230 V <sub>AC</sub> Part no.
Heater fan 400 W, modular	<b>60715-029</b>
Support rail DIN rail EN 50022 (35 mm), length 215 mm, 1 piece	<b>20715-001</b>

### TECHNICAL DATA

Voltage range	230 V <sub>AC</sub>
Current at switch-on	1.8 A
Heater output	400 W
Air capacity m <sup>3</sup> /h	Please choose desired fan
Surface temperature with fan	Approx. 140 °C
Type of protection	IP 20
Class of protection	I, with GND/earthing
Dimensions: height x width x depth in mm	22 x 120 x 160
Assembly	Clip for 35 mm DIN rail EN 50022

### NOTE

- **Attention:** Danger of overheating, never use heater without fan
- Fan see page 4.63
- Thermostat for heating see page 4.65
- Hygrostat see page 4.68



# Climate control – Accessories

## AC FANS FOR HEATING 400 W

- The fan is screwed below the heater and the cable is connected to the heater (please order connecting cable and protective grille separately)



Connecting cable

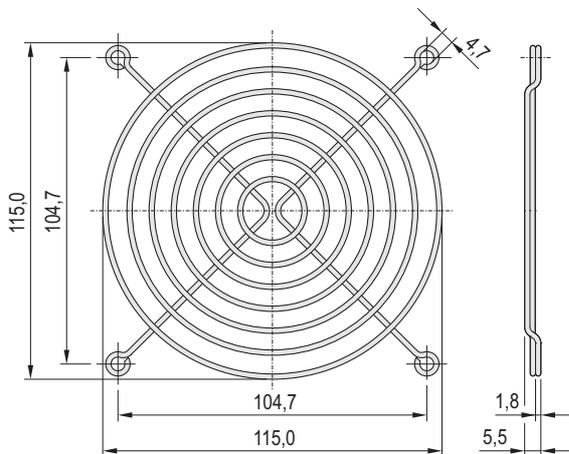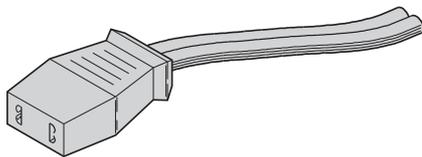

Protective grille

### DELIVERY COMPRISES

Item	Qty	Description
1	1	Fan (width 119 mm, depth 119 mm)

### ORDER INFORMATION

	Height mm	Airflow volume m <sup>3</sup> /h	115 V <sub>AC</sub> Part no.	230 V <sub>AC</sub> Part no.
Type A	25	84	<b>20713-146</b>	<b>20713-142</b>
Type B	25	108	<b>20713-147</b>	<b>20700-001</b>
Type C	38	162	<b>20713-244</b>	<b>20713-243</b>
PVC (2 x 0.75 mm <sup>2</sup> ), 1 m long with 2 Faston connectors 2.8 x 0.5 mm to DIN 46343 T1, 1 piece				<b>21101-246</b>
Protective grille, metal, to screw-on				<b>60197-019</b>

### DIMENSIONS AC fans

Type	Type A		Type B		Type C	
	50	60	50	60	50	60
Frequency in Hz	50	60	50	60	50	60
Airflow volume in m <sup>3</sup> /h	84	90	108	120	162	192
Noise level per fan in dB(A)	29	30	34	38	37	41
Max. static pressure in Pa	23	21	41	41	73	88
Max. ambient temperature in °C	70	70	70	70	70	70
Power consumption in W	8	7	14	11	15	14
Dimensions: height in mm (width 119 mm x depth 119 mm)	25		25		38	

### NOTE

- Please order connection cable and protective grille separately

# Climate control – Accessories

## SPEED CONTROL FOR FANS WITH C13 PLUG




01111001




01111002

Speed controller with connecting cables

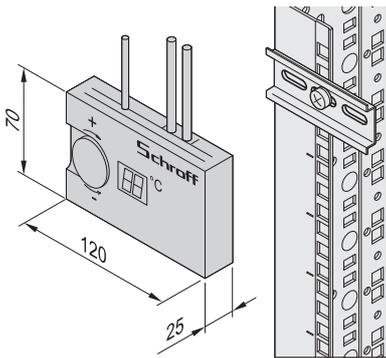


01105055

Block diagram

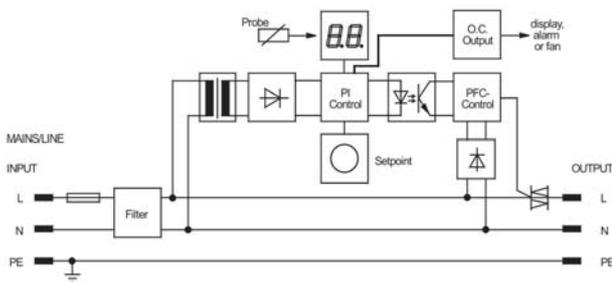

01111050

Speed varies in relation to temperature

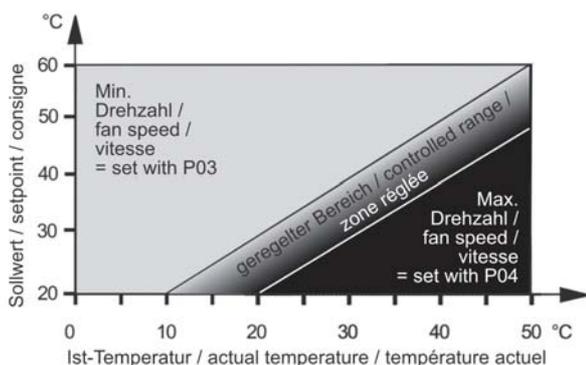

01111051

- Suitable for all AC fans and fan units (up to 300 W) with IEC 60320 C13 plug (plug & play)
- Simple to mount on the support rail provided
- Simple adjustment of switch-on temperature (with knob and digital display)
- External sensor can be fitted at a desired measurement point
- Open-collector output (parametrisable)
  - Alarm output (active/passive)
  - DC fans (PWM output)
  - Remote display (via optional digital display with front panel)

### DELIVERY COMPRISES

**NEW**

Item	Qty	Description
1	1	Speed controller; input/output voltages 115 ... 240 V <sub>AC</sub> , see Technical Data
2	1	Temperature sensor, cable length 1.5 m
3	1	Fan cable, 2 m, with IEC 60320 socket
4	1	Mains cable, 3 m, with connecting plug
5	1	Support rail, St, zinc-plated (EN 50022)
6	1	Assembly kit

### ORDER INFORMATION

Speed control for fans with C13 plug	Part no.
Mains cable SCHUKO/UTE plug	<b>60715-005</b>
Mains cable IEC 60320 C13 plug	<b>60715-006</b>
<b>Accessories</b>	
Thermostat with digital display 230 V <sub>AC</sub> , 1 piece	<b>Page 4.67</b>
Thermostat with digital display 115 V <sub>AC</sub> , 1 piece	<b>Page 4.67</b>
Connecting cable for DC fans or alarm output Length 2 m, 2-wire (0.34 mm <sup>2</sup> ), 1 piece	<b>60715-007</b>

### TECHNICAL DATA


Voltage range	115 ... 240 V <sub>AC</sub> (90 ... 264 V <sub>AC</sub> )
Frequency	48 ... 62 Hz
Power consumption	max. 4 VA
Display	LCD display, height 13 mm, red
Max. connection power	300 W (230 V <sub>AC</sub> ), 150 W (115 V <sub>AC</sub> )
Max. continuous current	1.3 A
Adjustment range	+20 ... +60 °C with potentiometer
Fan speed frequency	25 ... 100 %
Sensor	External NTC resistor
Sensor connection	AMP plug contact and cable, 1.5 m, 2 x 0.22 mm
In case of sensor failure	Max. speed
Fan connection	Cable 2 m with C13 IEC 60320 socket
Open-collector output	AMP plug contact, programmable function, V <sub>max.</sub> 30 V <sub>DC</sub> , I <sub>max.</sub> 30 mA
Mains connection	Cable 3 m with plug
Mechanics	Case, IP 30, plastic, weight 0.5 kg, mounts on horizontal rail with lip DIN EN 50022
Dimensions	Width 120 mm, height 70 mm, depth 25 mm
Environmental conditions	0 ... 60 °C, max. 85 % rel. humidity, non-condensing

### NOTE

- Thermostat with digital display, see page 4.67

# Climate control – Accessories

## THERMOSTAT WITH INTEGRATED TEMPERATURE SENSOR

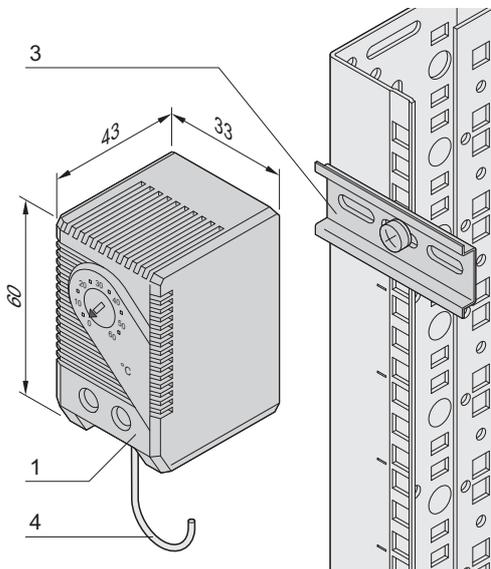

Connection cable: 2-pin, ferrules - IEC socket



Connection cable: 2-pin, ferrules - 3-pin, ferrules

- To control fans or heaters
- Adjustment range 5 ... 60 °C
- Individual adaptation with three separate components: thermostat (for cooling or heating), assembly material, connecting cable (IEC connector or ferrules)
- 2 versions
  - for heating
  - for cooling



### DELIVERY COMPRISES

Item	Qty	Description
0110804	1	1 Thermostat, width 33 mm, height 60 mm, depth 43 mm; clip-on attachment for 35 mm DIN rail EN 50022, switched voltage 120 ... 250 V <sub>AC</sub>
	2	1 User manual

### ORDER INFORMATION

Description	Part no. for cooling	Part no. for heating
Thermostat with integrated temperature sensor	<b>60715-136</b>	<b>60715-137</b>

### Accessories

Item 3 DIN rail (EN 50022) 35 mm; length 75 mm; with fixing materials kit, PU 1 set	<b>21120-178</b>
Item 4 Connection cable, SCHUKO/UTE connector, cable length 1.5 m; connection on thermostat/hygrostat, 2-pin, ferrules; connection on fan IEC socket; 1 piece	<b>62150-201</b>
Item 4 Connection cable, SCHUKO/UTE connector, cable length 1.5 m; connection on thermostat/hygrostat, 2-pin, ferrules; connection on fan/heater, 3-pin, ferrules, 1 piece	<b>62150-264</b>

### DIMENSIONS

0110850	Thermostat	for cooling (make contact), blue control button	for heating (break contact), red control button
	Adjustment range	0 ... 60 °C	
	Switching temperature difference	7 K (± 4 K tolerance)	
	Sensing element	Thermobimetal (snap-action contact)	
	Contact resistance	<10 m?	
	Lifespan	>100000 cycles	
	Max. switch performance	10 A at 250 V <sub>AC</sub> , 15 A at 120 V <sub>AC</sub> ; 30 W at DC voltage	
	Connection	2-pin clamp, up to 2.5 mm <sup>2</sup> , torque max. 0.5 Nm	
0110809	Case	Plastic, in accordance with UL 94 V-0, light grey	
	Dimensions	Height 60 mm, width 33 mm, depth 43 mm	
	Assembly	Clip for 35 mm DIN rail, EN 50022	
	Weight	40 g	
	Operating/storage temperature	-20 ... +80 °C/-45 ... +80 °C	
	Protection class	IP 20	

01108010

# Climate control – Accessories

## THERMOSTAT WITH INTEGRATED TEMPERATURE SENSOR



01102008

- To control heaters or fans
- Adjustment range 5 ... 60 °C

### DELIVERY COMPRISES

Item	Qty	Description
1	1	Thermostat with clip-on attachment for 35 mm DIN rail EN 50022, voltage 200 ... 250 V <sub>AC</sub> and 100 ... 130 V <sub>AC</sub>
2	1	Support rail, length 200 mm
3	1	Connection cable, length 1.5 m
4	1	Strain relief
5	1	Assembly kit for cabinet assembly

### ORDER INFORMATION

Description	Part no.
Thermostat with integrated temperature sensor	<b>20715-002</b>

### TECHNICAL DATA

Dimensions	Height: 75 mm, width: 75 mm, depth: 25 mm
Adjustment range	5 ... 60 °C
Switch difference	0,5 K
Supply voltage	200 ... 250 V <sub>AC</sub>
Contact load	Heat (terminals 1 - 2) 10 A / 4 A
(ohmic load/inductive load)	Cool (terminals 1 - 3) 5 A / 2 A
Contacts	Changeover contact, single pole
Type of assembly	Bolt-on, snap mounting for slide rail

## THERMOSTAT WITH EXTERNAL TEMPERATURE SENSOR



01102007

- To control heaters or fans
- External sensor can be positioned near the critical sub-assembly
- Adjustment range 20 ... 60 °C, switch difference 3 ... 10 K



### DELIVERY COMPRISES

Item	Qty	Description
1	1	Thermostat with external temperature sensor, sensor length approx. 1.7 m
2	1	Mounting plate for cabinet assembly, Al, 2.5 mm
3	1	Assembly kit

### ORDER INFORMATION

Description	Part no.
Thermostat with external temperature sensor	<b>20715-003</b>

### TECHNICAL DATA

Dimension (height x width x depth)	93 mm x 68 mm x 44 mm
Adjustment range	20 ... 60 °C
Switching difference	3 ... 10 K
Mains/line voltage	90 ... 260 V <sub>AC</sub>
Contact load (ohmic load/inductive load)	24 A/10 A
Contacts	Change-over, single pin
Assembly	Screw-fixed

# Climate control – Accessories

## THERMOSTAT WITH DIGITAL DISPLAY




- Adjustment range from -50 to +100 °C (switch difference 0 ... 10 °C)
- Display switchable from °C to °F
- Programmable (secured against unauthorised operation)
- 3-character red segment display



### ORDER INFORMATION

Description	Part no.
Thermostat with digital display, 230 V <sub>AC</sub>	<b>60715-132</b>
Thermostat with digital display, 115 V <sub>AC</sub>	<b>60715-133</b>
Front panel 1 U, RAL 7035 with cut-out for thermostat	<b>30118-315</b>
Front panel 1 U, anodised with cut-out for thermostat	<b>30118-267</b>
Front panel 1 U, RAL 7021 with cut-out for thermostat	<b>30118-360</b>

Front panel 1 U

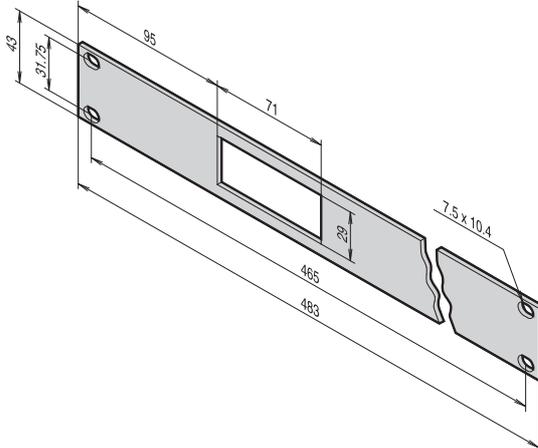

01197001

SZA45550

### TECHNICAL DATA


Operating voltage	115 V <sub>AC</sub> or 230 V <sub>AC</sub>
Power consumption	Approx. 3.5 W
Dimensions	Height: 35 mm, width: 76 mm, depth: 59 mm
Assembly cut-out	28.8 × 70.5 mm
Adjustment range	-50 ... +100 °C
Switch difference	0 ... 10 K selectable
Data safeguarding at power failure	Non-volatile memory
Contact load (ohmic load/inductive load)	8 A/3 A (ohmic/inductive load)
Input/sensor	PTC resistance, -55 ... +120 °C, cable length 3 m
Contacts	Relay, changeover contact, single pin
Protection class to front	IP 54
Connection	Screw-on terminals, 2.5 mm <sup>2</sup>
Fixing	With clamping bracket
Type of assembly	Can be screwed on

# Climate control – Accessories

## HYGROSTAT



Hygrostat with adjustable and permanently set relative humidity

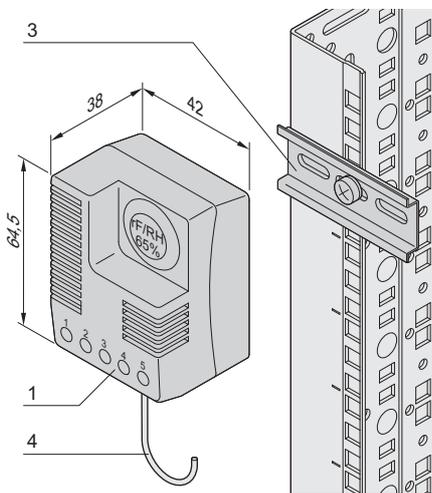

- Adjustable or fixed relative air humidity
- Switches fan or heaters when the set value is reached
- Visual display
- Integrated LED lights up when the connected consumer is switched on
- Individual adaptation with three separate components: Hygrostat, assembly material, connecting cable (input with SCHUKO/UTE connector; output with IEC connector or open end) please order separately



### DELIVERY INCLUDES (assembled)

01116006

Item	Qty	Description
1	1	Hygrostat, width 42 mm, height 64.5 mm, depth 38 mm; clip-on attachment for 35 mm DIN rail EN 50022
2	1	User manual

### ORDER INFORMATION

Description	Part no.
Hygrostat, fixed, 65 % air humidity	<b>60715-138</b>
Hygrostat, adjustable, 40 ... 90 % air humidity	<b>60715-213</b>
<b>Accessories</b>	
DIN rail (EN 50022) Item 3 35 mm; length 75 mm; with fixing materials kit, PU 1 set	<b>21120-178</b>
Connection cable Item 4 SCHUKO/UTE connector, cable length 1.5 m; connection on thermostat/hygrostat, 2-pin, ferrules; connection on fan IEC socket; 1 piece	<b>62150-201</b>
Connection cable Item 4 SCHUKO/UTE connector, cable length 1.5 m; connection on thermostat/hygrostat, 2-pin, ferrules; connection on fan/heater, 3-pin, ferrules, 1 piece	<b>62150-264</b>

01108051

### TECHNICAL DATA

Supply voltage	230 V <sub>AC</sub> , 50/60 Hz	
Default setting for relative air humidity	65 % fixed	40 ... 90% adjustable
Switch difference	5 % air humidity (w 1 % air humidity tolerance at 25 °C)	
Switch contact	Changeover contact (relay)	
Lifespan	> 50,000 cycles	
Max. switching capacity	8 A (16 A for 10 s)	
Mains supply	2-pin terminal, up to 2.5 mm <sup>2</sup> , torque max. 0.5 Nm	
Output change-over relay	3-pin terminal, up to 2.5 mm <sup>2</sup> , torque max. 0.5 Nm	
Case	Plastic, in accordance with UL 94 V-0, light gray	
Dimensions	Height 64.5 mm, width 42 mm, depth 38 mm	
Type of assembly	Clip for 35 mm DIN rail, EN 50022	
Weight	65 g	
Operating/storage temperature	0 ... +60 °C/-20 ... +70 °C	
Max. storage humidity	90 % air humidity (non-condensing)	
Type of protection	IP 20	



connecting cable, connection cable, 2-pole, ferrule - IEC-(female) connector; input jack; bush; socket

01108009




connecting cable, connection cable, 2-pole, ferrules - ferrules

01108010

# Climate control – Accessories

## IEC INPUT PLUG

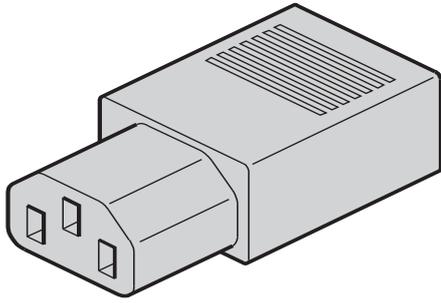

- For connection of fans
- Bolted housing made of heat-resistant plastic (UL 94 V-0)
- 10 A/250 V<sub>AC</sub>, protection class I

### ORDER INFORMATION

Description	Part no.
IEC input plug	<b>60715-046</b>

KTA45246

## **North America**

**Warwick, RI, USA**

Tel +1.800.525.4682

**San Diego, CA, USA**

Tel +1.800.854.7086

## **Europe, Middle East & India**

**Straubenhardt, Germany**

Tel +49 7082 794 0

**Betschdorf, France**

Tel +33 3 88 90 64 90

**Warsaw, Poland**

Tel +48 22 209 98 35

**Hemel Hempstead,**

**Great Britain**

Tel +44 1442 24 04 71

**Lainate, Italy**

Tel +39 02 932 714 1

**Dubai, United Arab Emirates**

Tel +971 4 37 81 700

**Bangalore, India**

Tel +91 80 67152000

**Istanbul, Turkey**

Tel +90 216 250 7374

## **Asia Pacific**

**Shanghai, China**

Tel +86 21 2412 6943

**Singapore**

Tel +65 6768 5800

**Shin-Yokohama, Japan**

Tel +81 45 476 0271

Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**



[nVent.com/SCHROFF](https://www.nVent.com/SCHROFF)