


15" Open Frame Capacitive Touch Monitor

FT15TMCAPOFHBOB




- 1.1mm cover glass with 7H surface hardness
- Optically bonded Touch Panel to LCD Panel
- Anti-glare surface treatment (chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- A+ quality LED backlight panels with 100k hours lifetime
- 1000+ cd/m² brightness
- Integrated audio speakers (2x2w)
- 2 year guarantee



faytech's Open Frame Capacitive Touch Monitors are the perfect choice for industrial and business applications. The capacitive 10-finger multitouch panel brings an easy using experience for a wide range of applications. Each model in this series is built for reliable and extended service by using an A+ quality HD LCD panel with energy efficient LED technology. It is equipped with a wide range of standard connectors, such as HDMI, DVI, VGA, USB-Touch, serial and DC-In.

This device has an optically bonded touch panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general. This open frame version is a light weight model without any back case, which makes it perfect for integrating into your own system or mount at different locations.

It is the perfect interactive solution for digital signage, classrooms, meeting rooms, industrial automation, shopping malls, hotels and many other areas.



| | |
|----------------------------|--|
| Product Name | 15" Open Frame Capacitive Touch Monitor |
| Model No. / EAN No. | FT15TMCAPOFHBOB / 6920734015016 |

| IP Rating | |
|------------------------|--|
| IP65 Front / IP40 Back | |

| LCD Panel | |
|--|---------------|
| Screen diagonal (Inch/cm) | 15/38.1 |
| Display active screen size (cm) | 30.4×22.8 |
| Aspect ratio | 4:3 |
| Physical resolution | 1024×768 |
| Maximum showable resolution | 1920×1200 |
| Colours displayed | 16.7M |
| Brightness (cd/m ²) | 1000 |
| Contrast | 700:1 |
| Typical reaction time Tr/Tf (ms) | 8/12 |
| Visual Angle horizontal/vertical (°) | 160/160 |
| Backlight / Backlight Lifetime (hours) | LED / 100,000 |



| External Connectors | |
|---------------------|--------------------------|
| Video | 1x HDMI 1.3 (incl. HDCP) |
| | 1x DVI-D |
| | 1x VGA |
| Audio | 1x PC-Audio |
| Touch Connector | 1x USB |
| Connectors | 1x Serial |
| | 1x 12V DC-In |

| Touch Panel | |
|-----------------------|--|
| Touch Technology | Projected Capacitive 10-point Multitouch |
| Touch Panel Drivers | Windows; Linux; Mac; Android |
| Touch Life (Contacts) | Unlimited |
| Surface Hardness | 7H |
| Surface Treatment | Anti glare (chemical etching) |

| Operation / Mechanical | |
|---|------------------------------|
| Operating Temperature (°C) | -10 ~ +60 |
| Humidity Range (RH) | 10% - 90% |
| Net weight (kg) | 3.00 |
| Gross weight (kg) | 5.30 (incl. cartonage) |
| Housing material (open frame) | Aluminum |
| Housing (mm) L × W × H | 362.0 × 286.0 × 49.4 |
| Cut-out required (mm) L × H | 346.0 × 264.0 |
| Amount of clamps required | 8 |
| (optional) Tape length required (mm) | 1252.0 (2× 356.0 + 2× 270.0) |
| (optional) Amount of glue required (ml) | 6.26 |
| Mounting | VESA 100 |

| Power | |
|--------------------------|--|
| Power Supply | 100-240V ACDC active switching; 12V DC-Out |
| Working Power (V) | 12 |
| Power Consumption (W) | 15 |
| Stand-By Consumption (W) | <1 |

| Included in the Delivery | |
|----------------------------------|--|
| Power Supply (see Power section) | |
| Short Installation Manual | |
| HDMI Cable | |
| USB Cable | |

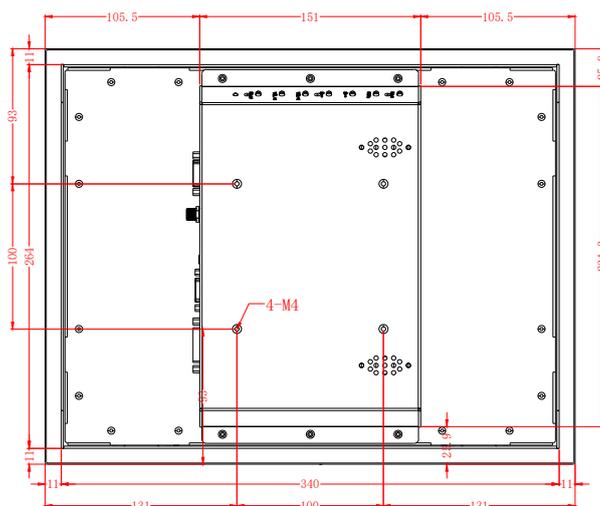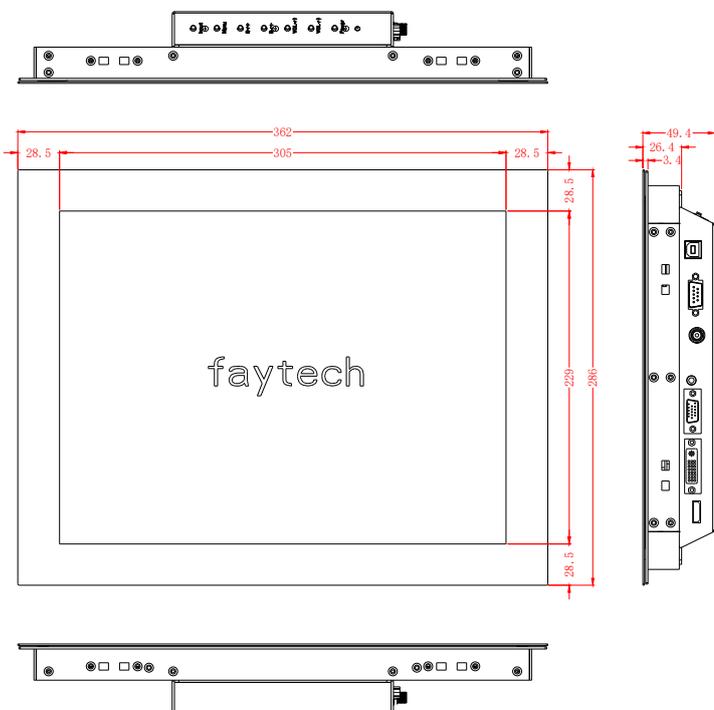

General Tolerance ISO 2768c

Corporate Headquarters

faytech AG
 Bischhäuser Aue 10
 37213 Witzenhausen
 Germany

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 8958 0612
 Germany: +49 5542 30374 10
 USA: +1 646 205 3214
 India: +91 11 49707436
 Japan: +070 4127 5167