

LMX-1204G-SFP Series

Features

12-Port Industrial Gigabit Managed Ethernet Switches, w/8*10/100/1000Tx, 4*100/1000Fx, 12~48VDC Power Input




- ▶ Supports 8*10/100/1000Tx and 4*100/1000Fx Dual Rate SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Port Lock Function for Unauthorized Access Based on MAC Address Blocking
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp.- STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-1204G-SFP series is a 12-port industrial managed Ethernet switch that is embedded with 8*10/100/1000Tx Ethernet ports and 4*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMX-1204G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-1204G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

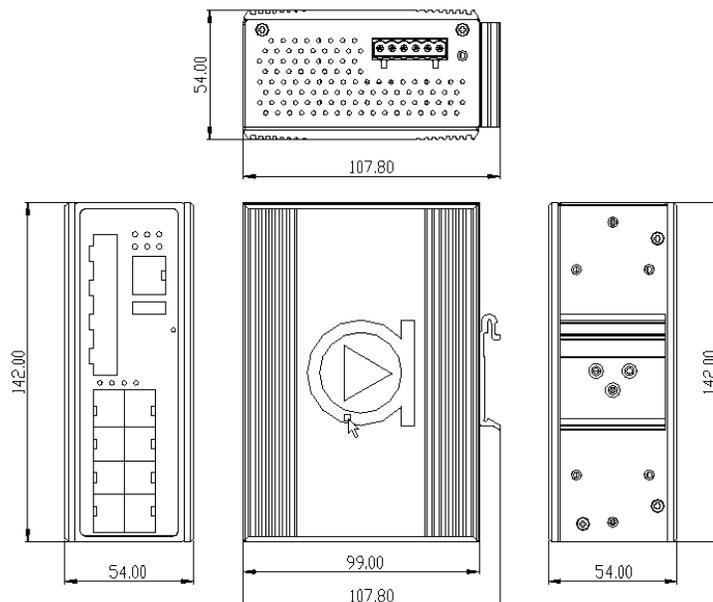

SPECIFICATIONS

Technology

IEEE 802.3 10Tx Ethernet
 IEEE 802.3u 100Tx Fast Ethernet
 IEEE 802.3ab 1000Tx Gigabit Ethernet
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control for Full Duplex
 IEEE 802.3ad for Port Trunk with LACP
 IEEE 802.1d STP (Spanning Tree Protocol)

Standards

IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
 IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)
 ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol
 IEEE 802.1Q for VLAN Tagging
 IEEE 802.1x for Network Authentication
 IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization

Switch Properties

Switch Architecture

Back-Plane (Switching Fabric): 24.0Gbps

Protocol

IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6

Data Process

Store and forward

Transfer Rate

14,880pps for 10Base-T Ethernet
 148,800pps for 100Base-T Fast Ethernet
 1,488,000pps for Gigabit Ethernet

Packet Buffer

4 Mbits

MAC Table

8K

Jumbo Frame

9.6K

Flow Control

IEEE 802.3x for full duplex mode, back pressure for half duplex mode

VLAN Group

0 ~ 4094

IGMP Group

Up to 256 Groups

Port Interface

Ethernet RJ45 Port

8*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection

Fiber Port

4*100/1000 Dual Rate SFP Slots

Wavelength

Dependent on Fiber type and Distance

RS232 Serial Console

1*RS232 in RJ45 connector with console cable, 115.2bps, 8,N,1

Configuration Backup

1*USB 2.0

Protection

Overload Current

Present

Power Reverse Polarity

Present (the unit will not be on, if power reverse)

Network Cable

10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable;
 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m)
 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)

Mechanical Characteristics

LED Indicator

Per Unit: Power 1 & 2 (Green), Fault (Red)

Housing

Metal IP30 rated

Dimensions

54 x 142 x 99 mm

Weight

Unit: 2.5 lbs; Shipping: 3.0 lbs

Mounting

DIN-Rail; Wall-mount (Optional)

Power Requirement

Input Voltage

12~48VDC Redundant Input

Power Connection

1 removable 6-contact terminal block

Power Consumption

15 Watts

Environmental Limits

Operating Temperature

STD: -10° to 70°C

Storage Temperature

EOT: -40° to 75°C

Ambient Relative Humidity

-40°C ~ 85°C

Regulatory Approvals

EMI

5 to 95%, (Non-Condensing)

EMS

FCC Class A

Free Fall

EN6100-4-2,3,4,5,6,8

Shock

EN6100-6-2,4

Vibration

IEC60068-2-32

Green

IEC60068-2-27

Certifications

IEC60068-2-6

Warranty

RoHS Compliant

Warranty

FCC, CE, UL-61010-2-201(Pending)

5 Years

ORDERING INFO

LMX-1204G-SFP	12-Port Industrial Managed Ethernet Switch with 8*10/100/1000Tx + 4*100/1000Fx SFP Slots, 12~48VDC Power Input
LMX-1204G-SFP-T	12-Port Industrial Managed Ethernet Switch with 8*10/100/1000Tx + 4*100/1000Fx SFP Slots, 12~48VDC Power Input; EOT: -40° to 75°C

Optional Accessories

MDR-20-24	20W Industrial Din Rail Miniature Power Supply (24VDC)
MDR-40-48	40W Industrial Din Rail Power Supply (48VDC)
DR-75-48	75W Industrial Din Rail Power Supply (48VDC)
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
DIN-RACK-2U	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height