


MSC-108B

8-Port RS-422/485 Universal PCI Card

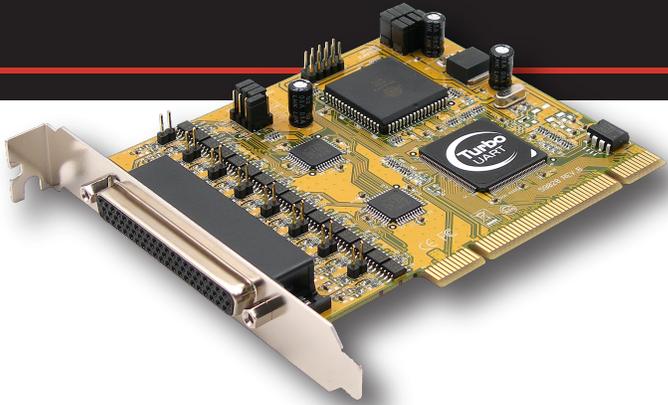

Features

- ▶ Supports 8 x 16C950 UART Serial Ports over PCI Slot
- ▶ PCI 32-bit, PIO Mode with 133MB/S Bandwidth
- ▶ Supports RS-485 Auto Transceiver Turn Around by Unique Featured ATTA™ Hardware
- ▶ PCI IRQ Sharing Feature Eliminates IRQ Conflicts
- ▶ 8 x DB9-male Connectors with DB62M Octopus Cable
- ▶ 4-wire RS-422/485 and 2-wire RS-485 applications
- ▶ Supports 128-Byte Deep FIFO
- ▶ Supports Baud Rate up to 921.6Kpbs
- ▶ Supports Windows 95/98/Me, NT, 2000, XP, 2003, Vista, & Linux

Specifications

System

For 32-bit 33/66MHZ PCI Bus Systems

PCI Interface

Fully PCI Bus Specification 2.2 compliant

Serial Port(s)

8 x RS-422/485 via DB62F Connector

Interface

3 modes are selectable:

- 4-wire RS-422 (TXD+/-, RxD+/-)
- 2-wire RS-485 (TxD+/-, RxD+/-)
- 2-wire RS-485 (Data+/-, Data+/-)

Parity

None, Even, Odd

Data bits

5,6,7,8,9 bits Data Frames

Baud Rate

Up to 921.6Kbps

Terminator

120 OHM, can be Enabled/Disabled by Jumpers

ATTA™

Auto RS-485 Transmitter buffer direction control by the ATTA™ Hardware

Cable

DB62M to 8*DB9M

OS Support

Windows 9x, Me, XP, NT, 2000, 2003, Vista, and Linux

Operating Temperature

0 to 55°C (32 to 131°F)

Operating Humidity

10% to 90% relative humidity (non-condensing)

Storage Temperature

-40 to 75°C (-40 to 167°F)

Storage Humidity

5% to 95% relative humidity (non-condensing)

Dimensions

4.73" x 3.75" (12.00cm x 9.52cm)

Warranty

5-Year Warranty

Ordering Information

MSC-108B

8-Port RS-422/485 Universal PCI Card