



CONNECT AND PROTECT

Epcase

Wall mounted cases – Epcase

OVERVIEW

MAIN KATALOG

Cabinets	1
Wall mounted cases	2
Accessories for cabinets and wall mounted cases . .	3
Climate control . .	4
Electronics cases	5
Subracks/ 19" chassis	6
Front panels, plug-in units	7
Systems	8
Power supply units	9
Backplanes	10
Connectors, front panel component system	11
Appendix	12



01505008



Hinged side panels for easy access

01506002






01505003

Optimum space utilisation due to an additional vertical 19" plane; fans retrofittable

STANDARDS

- Type of protection IP 20
IEC 60529

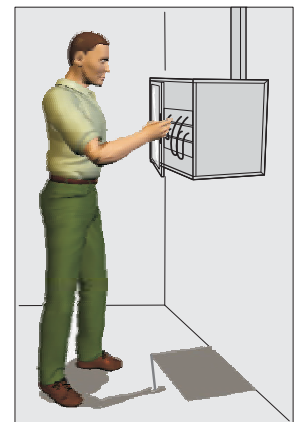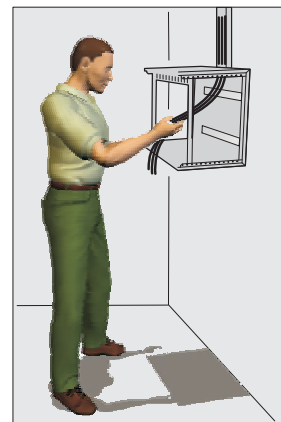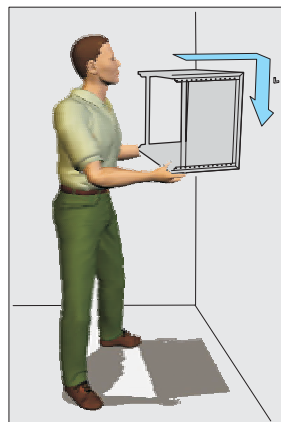

01504051


Simple design and assembly: mounting, wiring, cladding

Wall mounted cases – Epcase

OVERVIEW

LOW-COST WALL MOUNTED CASE

- Hinged side panels for easy access
- Completely pre-assembled
- Optimum space utilisation through depth-adjustable 19" slide mounts and an additional vertical 19" plane
- Type of protection IP 20

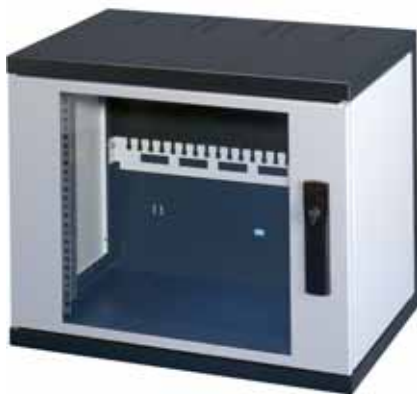

01506001

EPCASE 19"

- 19" assembly from 9 ... 20 U



01505006

EPCASE 10"

- 10" assembly from 4 ... 12 U

SERVICEPLUS

- e.g. special colours, special sizes
- e.g. air conditioning
- e.g. fittings, conversions, cut-outs
- e.g. custom solutions

Overview 2.24

epcase 19"	
19" wall mounted case	2.26
Fan	2.27
Protective grille . .	2.27
Air filter	2.28
Lever handle	2.28
19" equipment shelf	2.29
Modem shelf	2.30
Vertical 19" plane . .	2.30
Cable eye	2.31
Cable support rail . .	2.31
Short slide rail . . .	2.31




epcase 10"	
10" wall mounted case	2.32
Air filter	2.33
Equipment support	2.33
10" front panel . . .	2.34
10" socket strip 1 U, SCHUKO	2.35

Wall mounted cases – Epcase

19" WALL MOUNTED CASE



01506002

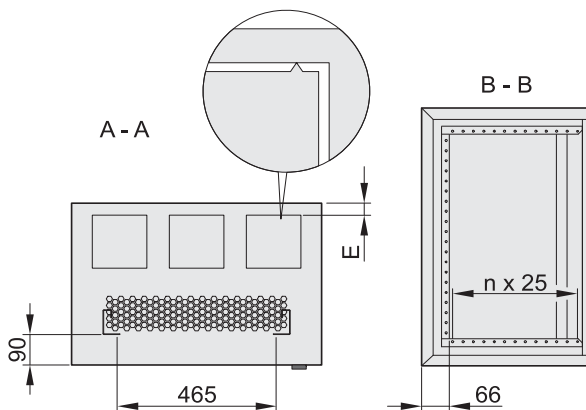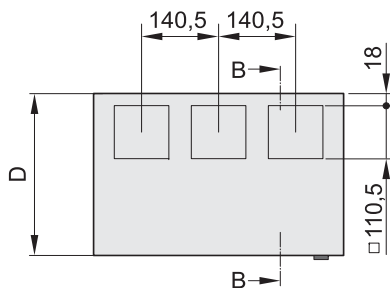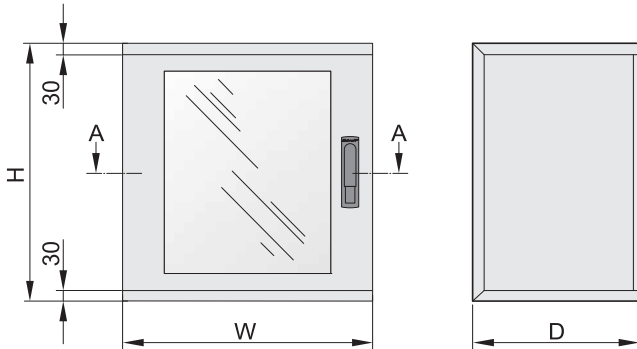

eca46458

- Multi functional 19" wall case with hinged side panels
- Cable entry possible from above or below; the cable entry opening can be sealed with two brush strips each, resp. can be used to assemble fan
- Cable support rail is included and is adjustable in 25 mm increments
- 19" panel/slide mounts are depth-adjustable in 25 mm increments
- Type of protection IP 20

DELIVERY COMPRISES (assembled)

Item	Qty	Description
1	1	Basic case, C form, St, 2 mm, RAL 7021
2	1	Glazed door with key/lock (key no. 2233), door handle cut-out S2100, frame, St, 1.5 mm, RAL 7035, Sekurit glass 4 mm
3	2	Side panel, St, 1.5 mm, RAL 7035
4	1	Cable support rail, St, RAL 7035
5	2	19" slide mounts, St, 2 mm, finish AlZn
6	2	Brush strip (to cover cable entry opening)
7	1	Assembly kit for wall mounting

ORDER INFORMATION


Height U	Height H mm	Width W mm	Depth D mm	E mm	Weight kg	Load-carrying capacity kg	Part no.
9	487	600	300	18	18	60	10236-151
9	487	600	400	18	20	35	10236-152
12	612	600	400	18	24	35	10236-156
12	612	600	500	85	25	30	10236-157
16	812	600	400	18	28	35	10236-160
16	812	600	500	85	30	30	10236-161
16	812	600	600	85	32	25	10236-162
20	962	600	500	85	34	30	10236-165
20	962	600	600	85	38	25	10236-166
GND/earthing, PU 1 kit							21236-097
Brush strip, 1 piece							21236-094
Feet, plastic, black, PU 4 pieces							21236-089
Cable shell for cable bundle 30 ... 34 mm, PU 10 pieces							20114-728
Cable tie 92 mm x 2.5 mm, PU 25 pieces							20118-351
19" assembly kit (screw, washer, nut) (32 x M6 screws x 16, 32 x plastic washers, 32 x cage nuts)							21190-435

NOTE

- Lever handle for single point locking with DIN profile half cylinder is retrofittable, see page 2.28

Wall mounted cases – Epcase

FAN WITH COVERING GRILLE, 230 V_{AC}

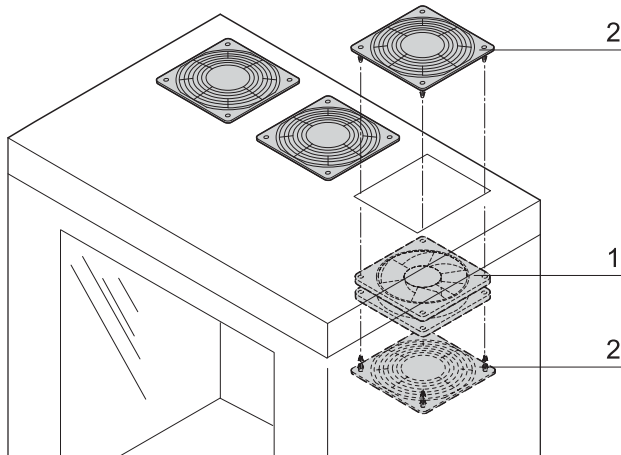

01503057

- For assembly in cable ducting openings (top/bottom)
- Assembly of fan by clipping in protective grilles
- Connect up to 3 fans via separate connecting cable

DELIVERY COMPRISES

Item	Qty	Description
1	1	230 V _{AC} fan, dimensions 38 x 119 x 119 mm
2	2	Protective grille, plastic, black

ORDER INFORMATION

Description	Part no.
Fan with covering grille, 230 V _{AC}	21236-092
Connecting cable for 1 ... 3 fans IEC-320 male connector, 1 piece	21236-099
Thermostat with mains/line connector, 230 V _{AC} , SCHUKO/UTE connector, IEC-320 female connector, 1 piece	20118-750

TECHNICAL DATA


Frequency	50 Hz	60 Hz
Voltage	230 V _{AC}	230 V _{AC}
Air volume, unrestricted	162 m ³ /h	192 m ³ /h
Noise pressure level	37 dB(A)	41 dB(A)
Max. static pressure	73 Pa	88 Pa
Max. ambient temperature	+70 °C	+70 °C
Power consumption	15 W	14 W

NOTE


- Please order connecting cable separately

01505057

Connecting cable and earthing for 1 ... 3 fans

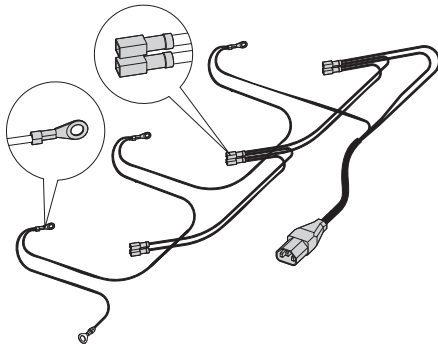

PROTECTIVE GRILLE

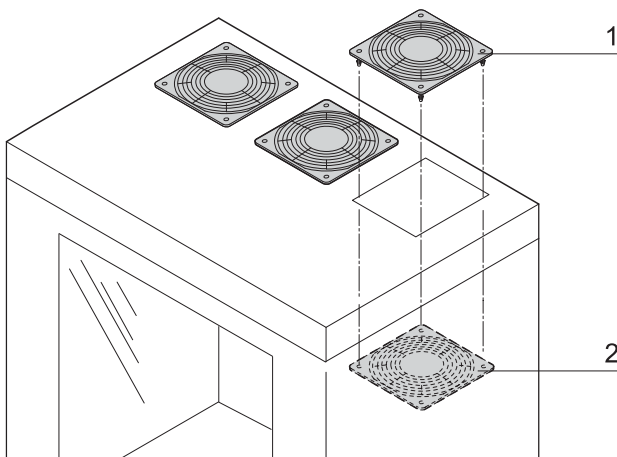

01505058

- For passive cooling
- To cover the opening

DELIVERY COMPRISES


Item	Qty	Description
1	1	Protective grille with pins, plastic, black
2	2	Protective grille with cut-outs, plastic, black

ORDER INFORMATION

Description	Part no.
Protective grille	21236-127

Wall mounted cases – Epcase

AIR FILTER FOR 19" WALL MOUNTED CASE

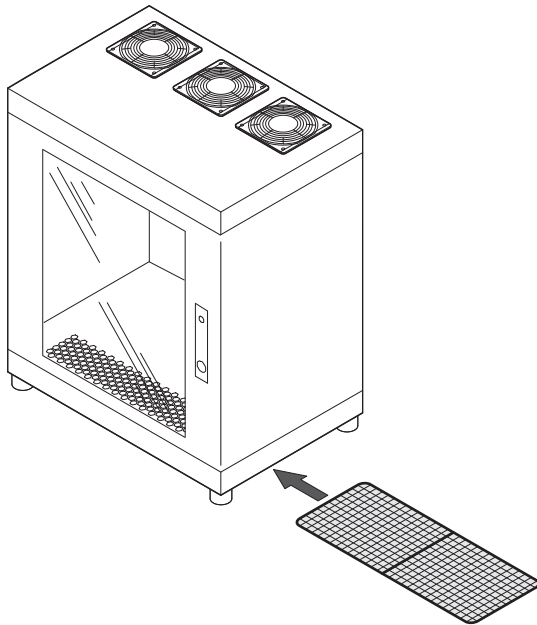

01505059

- Filtering of the inlet air at the case bottom
- Assembly beneath the case, easy filter replacement
- Filter class G3

DELIVERY COMPRISES

Item	Qty	Description
1	2	Support bracket, St, 1 mm, RAL 7021
2	3	Filter mat with round steel frame, filter class G3
3	1	Assembly kit

ORDER INFORMATION

Description	Part no.
Air filter for case depth 300/400 mm	21236-103
Air filter for case depth 500/600 mm	21236-104
Replacement filter mat for case depth 300/400 mm, PU 3 pieces	21236-125
Replacement filter mat for case depth 500/600 mm, PU 3 pieces	21236-123

LEVER HANDLE FOR SINGLE POINT LOCKING



01005016

- For installation instead of key lock insert
- To open press push-button
- DIN profile half cylinder retrofittable

DELIVERY COMPRISES

Item	Qty	Description
1	1	Lever handle for single point locking
2	1	Assembly kit

ORDER INFORMATION

Description	Part no.
Lever handle for single point locking	23130-067
Accessories	
DIN profile half cylinder, common locking for lever handle (1 key type 333 fits all locks) incl. 2 keys	25127-995
DIN profile half cylinder, common locking for lever handle (1 key type 2233 fits all locks) incl. 2 keys	60130-402

NOTE

- Other locks such as ASSA, KABA or RONIS available on request

Wall mounted cases – Epcase

19" EQUIPMENT SHELF, 1 U



00508006

- Static load-carrying capacity 5 kg
- Mounting height 1 U

DELIVERY COMPRISES

Item	Qty	Description
1	1	Equipment shelf, St, 1.5 mm

ORDER INFORMATION

Width mm	Depth mm	RAL 7035 Part no.
447	390	20118-783
19" assembly kit (screw, washer, nut) (4 x M6 screws x 16, 4 x plastic washers, 4 x cage nuts)		21190-095

19" EQUIPMENT SHELF, 2 U



00508002

- Static load-carrying capacity 10 kg
- Mounting height 2 U

DELIVERY COMPRISES

Item	Qty	Description
1	1	Equipment shelf, St, 1.5 mm

ORDER INFORMATION

Width mm	Depth mm	RAL 7035 Part no.
447	238	20118-785
19" assembly kit (screw, washer, nut) (4 x M6 screws x 16, 4 x plastic washers, 4 x cage nuts)		21190-095

19" EQUIPMENT SHELF, DEPTH-ADJUSTABLE, 2 U



00508009

- Static load-carrying capacity 15 kg
- Mounting height 2 U
- Depth-adjustable in 25 mm increments (front protrusion min. 26 mm)

DELIVERY COMPRISES (kit)


Item	Qty	Description
1	1	Equipment shelf, St, 1.5 mm
2	2	Mounting bracket with assembly kit, St, 1.5 mm

ORDER INFORMATION

Width mm	Depth mm	RAL 7035 Part no.
430	250	20118-790
430	300	
19" assembly kit (screw, washer, nut) (4 x M6 screws x 16, 4 x plastic washers, 4 x cage nuts)		21190-095

Wall mounted cases – Epcase

MODEM SHELF

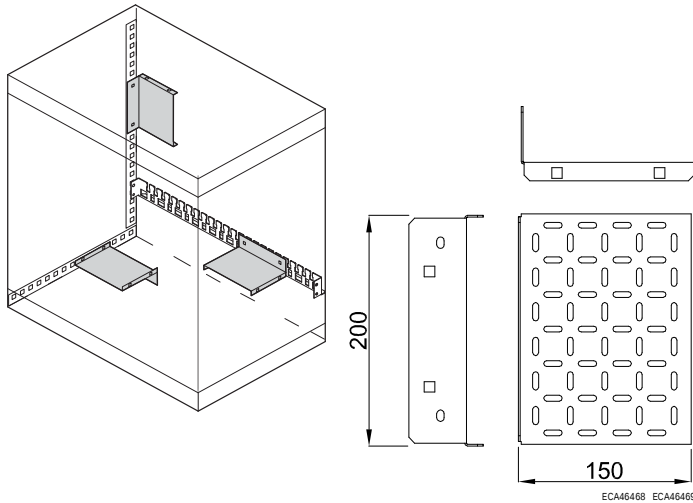

- For fixing modems and other devices
- Assembly onto the cable support rail or direct onto the case
- Static load-carrying capacity 3 kg


DELIVERY COMPRISES

Item	Qty	Description
1	1	Modem shelf, St, 1.5 mm, RAL 7035
2	1	Assembly kit

ORDER INFORMATION

Width mm	Depth mm	Part no.
200	150	21236-122

VERTICAL 19" PLANE

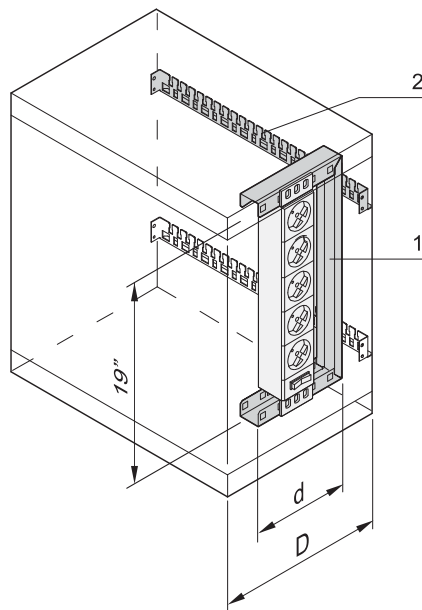

- For lateral, vertical assembly of 19" components
- Useable for case heights from 12 U


DELIVERY COMPRISES (kit)

Item	Qty	Description
1	1	Vertical 19" plane, St, 2 mm, RAL 7035
2	1	Cable support rail, St, RAL 7035
3	1	Assembly kit

ORDER INFORMATION

Height U	d mm	For case depth D mm	Part no.
3	167	300 ... 600	21236-120
6	300	400 ... 600	21236-121

Assembly example with 19" socket strip

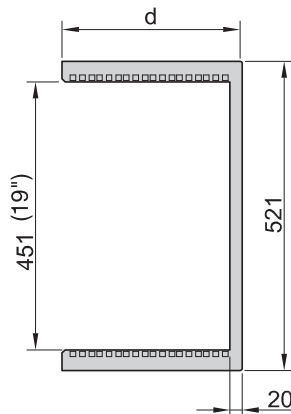


01505062

ECA46477

Wall mounted cases – Epcase

CABLE EYE

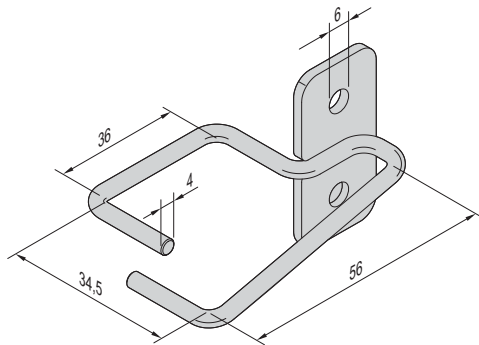

01505051

- For cable fixing/ducting laterally on the panel slide mounts


DELIVERY COMPRISES

Item	Qty	Description
1	4	Cable eye, St, 4 mm, zinc-plated
2	1	Assembly kit

ORDER INFORMATION

Description	Part no.
Cable eye	21236-102

CABLE SUPPORT RAIL

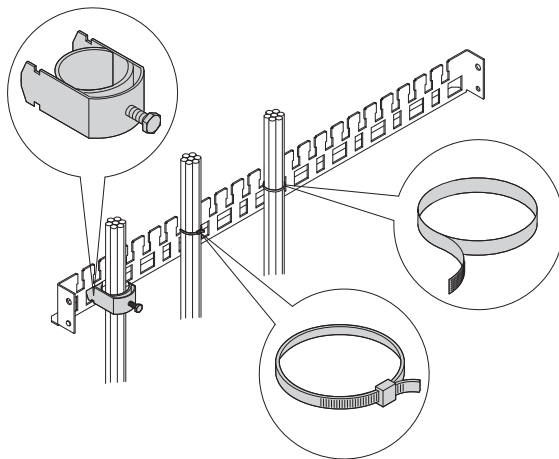

01505052

- For strain relief or cable ducting on rear
- Height-adjustable in 25 mm increments

DELIVERY COMPRISES

Item	Qty	Description
1	1	Cable support rail, St, 1.5 mm, RAL 7035
2	1	Assembly kit


ORDER INFORMATION

Description	Part no.
Cable support rail	21236-090
Cable shell for cable bundle 30 ... 34 mm, PU 10 pieces	20114-728
Cable tie 92 mm x 2.5 mm, PU 25 pieces	20118-351
Velcro strip Polyethylen/Polyamide, black, length 300 mm, PU 10 pieces	20118-624

NOTE

- A cable support rail is already supplied with the 19" wall mounted case

SHORT SLIDE RAIL

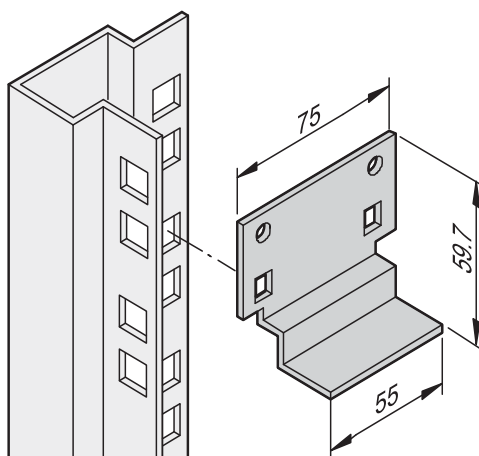

sc96xxxx

- Support for heavy 19" chassis
- To attach on 19" slide mounts
- Static load-carrying capacity max. 15 kg per pair

DELIVERY COMPRISES

Item	Qty	Description
1	2 / 10	Short slide rail, St, 1.5 mm, finish AlZn
2	1	Assembly kit

ORDER INFORMATION

Description	Qty/PU	Part no.
Short slide rail	2	23130-094
Short slide rail	10	23130-095

Wall mounted cases – Epcase

10" WALL MOUNTED CASE




- Multi-functional 10" wall case with hinged side panels
- Cable entry possible from above or below; the cable entry opening can be sealed with a brush strip
- 10" slide mounts are depth-adjustable in 25 mm increments

DELIVERY COMPRISES (assembled)

Item	Qty	Description
1	1	Basic case, C-form, St, 2 mm, RAL 7021
2	1	Glazed door with key lock (key no. 2233), frame, St, 1.5 mm, RAL 7035, Sekurit glass, 4 mm
3	2	Side panel, St, 1.5 mm, RAL 7035
4	2	10" panel/slide mounts, St, 1.5 mm, finish AlZn
5	2	Brush strips
6	1	Assembly kit for wall mounting

01505007

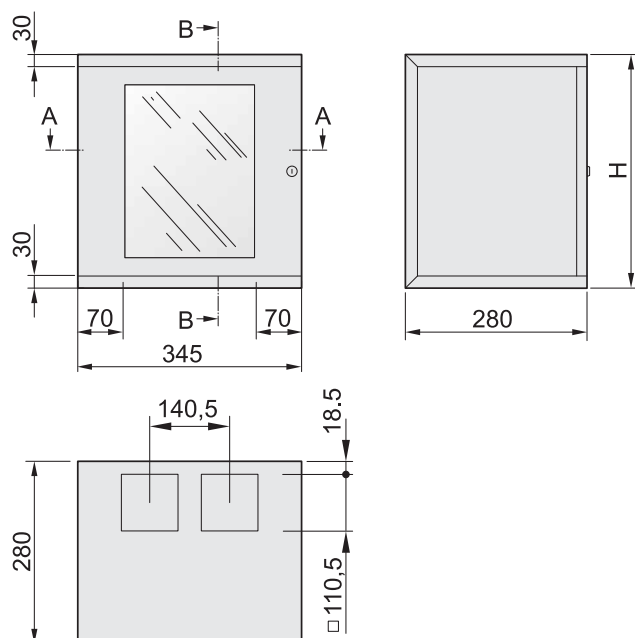


ORDER INFORMATION

Height U	Height H mm	Width W mm	Depth D mm	Weight kg	Part no.
4	262	345	280	5	10238-151
8	462	345	280	10	10238-152
12	612	345	280	23	10238-153
GND/earthing, PU 1 kit					21236-097
Cable tie 92 mm x 2.5 mm, PU 25 pieces					20118-351
19" assembly kit (screw, washer, nut) (32 x M6 screws x 16, 32 x plastic washers, 32 x cage nuts)					21190-435
Feet, plastic, black, PU 4 pieces					21236-089

NOTE


- Lever handle and DIN profile half cylinder cannot be retrofitted

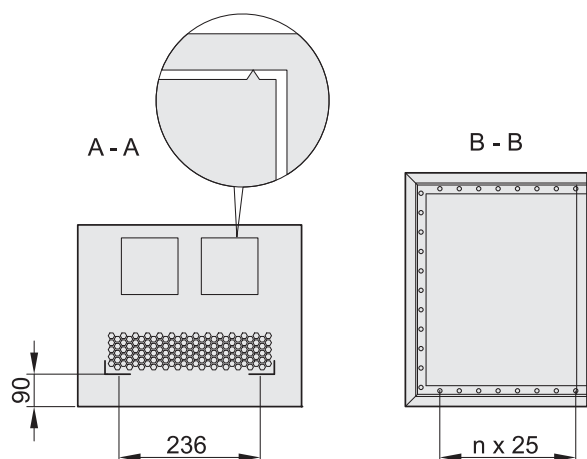

eca46478

Wall mounted cases – Epcase

AIR FILTER FOR 10" WALL MOUNTED CASE

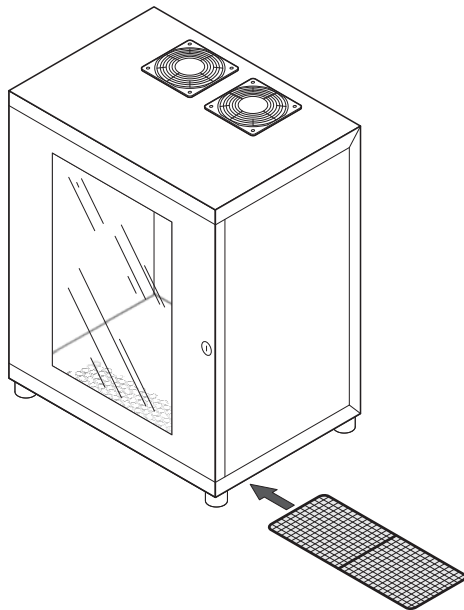

01506050

- Filtering of the inlet air at the case bottom
- Assembly beneath the case, easy filter replacement
- Filter class G3


DELIVERY COMPRISES

Item	Qty	Description
1	2	Support bracket, St, 1 mm, RAL 7021
2	3	Filter mat with round steel frame, filter class G3
3	1	Assembly kit

ORDER INFORMATION

Description	Part no.
Air filter for 10" wall mounted case	21236-095
Replacement filter mat for 10" wall mounted case PU 3 pieces	21236-126

EQUIPMENT SHELF FOR 10" WALL MOUNTED CASE

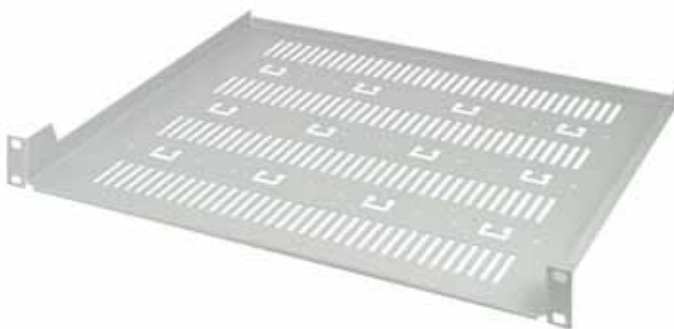

00508006

- Static load-carrying capacity 5 kg
- Mounting height 1 U
- Width 10" (254 mm)

DELIVERY COMPRISES


Item	Qty	Description
1	1	Equipment shelf, St, 1.5 mm, RAL 7035
2	1	Assembly kit

ORDER INFORMATION

Width mm	Depth mm	Part no.
220	150	20118-716

Wall mounted cases – Epcase

10" FRONT PANELS

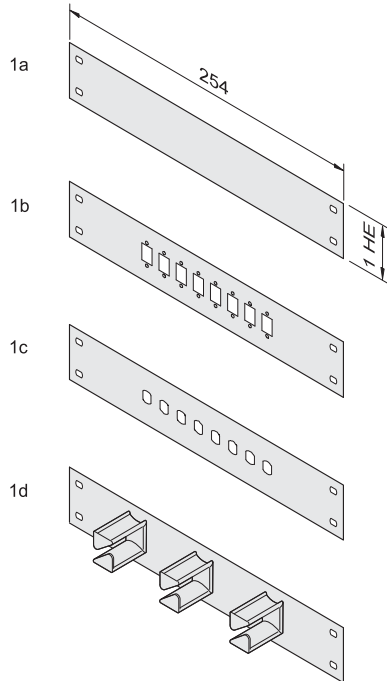

01503053

- Height 1 U
- Width 10" (254 mm)

DELIVERY COMPRISES

Item	Qty	Description
1	1	Front panel, St, 1.5 mm, RAL 7035

ORDER INFORMATION

Item	Description	Qty/PU	Part no.
1a	10" blank front panel, St, 1.5 mm, RAL 7035	1	20118-717
1b	10" front panel, 8 ports SC, St, 1.5 mm, RAL 7035	1	20118-713
1c	10" front panel, 8 ports ST, St, 1.5 mm, RAL 7035	1	20118-714
1d	10" front panel with 3 plastic cable eyes, St, 1.5 mm, RAL 7035	1	20118-715
Assembly kit PU = 8 × screw, washer, nut			21100-435

Wall mounted cases – Epcase

10" SOCKET STRIP, 1 U



- Socket strip with four socket inserts
- Bracket for mounting on 10" upright is included

DELIVERY COMPRISES

Item	Qty	Description
1	1	Socket strip 10", 1 U, 4 socket inserts, 2 m connecting cable with SCHUKO/UTE connector
2	2	Mounting bracket for 10" assembly

ORDER INFORMATION

Description	Part no.
10" socket strip, 4 SCHUKO socket inserts	60110-201
Socket strip 10", 4 UTE socket inserts	60110-220
Assembly kit PU = 8 x screw, washer, nut	21100-435

00704001

North America

Warwick, RI, USA

Tel +1.800.525.4682

San Diego, CA, USA

Tel +1.800.854.7086

Europe, Middle East & India

Straubenhardt, Germany

Tel +49 7082 794 0

Betschdorf, France

Tel +33 3 88 90 64 90

Warsaw, Poland

Tel +48 22 209 98 35

**Hemel Hempstead,
Great Britain**

Tel +44 1442 24 04 71

Lainate, Italy

Tel +39 02 932 714 1

Dubai, United Arab Emirates

Tel +971 4 37 81 700

Bangalore, India

Tel +91 80 67152000

Istanbul, Turkey

Tel +90 216 250 7374

Asia Pacific

Shanghai, China

Tel +86 21 2412 6943

Singapore

Tel +65 6768 5800

Shin-Yokohama, Japan

Tel +81 45 476 0271

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



nVent.com/SCHROFF